

11/17/00

09/14/00

Jc658 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL LETTER

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
00F00057US

Jc658 U.S. PTO

09/14/00

11/17/00

To the Assistant Commissioner for Patents:

Transmitted herewith for filing is the patent application of:

Hiroshi YAMANE, Nagayasu BESSHO, Yuji MIKI, Shuji TAKEUCHI
and Tadasu KIRIHARA
corresponding to Japanese applications 11-138667, filed May
19, 1999; 11-181137, filed June 28, 1999; 2000-207972, filed
July 10, 2000 and 2000-207973, filed July 10, 2000,
entitled: METHOD AND APPARATUS FOR CONTINUOUS CASTING OF METALS

Enclosed are:

<input checked="" type="checkbox"/>	42 pages of specification.
<input checked="" type="checkbox"/>	12 sheets of formal drawings.
<input type="checkbox"/>	a newly-executed declaration of the inventor.
<input type="checkbox"/>	a copy of an executed declaration of the inventor from prior application Serial No. , filed .
<input type="checkbox"/>	incorporation by reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied as indicated in the preceding box, is considered as being part of the disclosure of the accom- panying application and is hereby incorporated by reference therein.
<input type="checkbox"/>	an assignment of the invention to , including assignment cover sheet.
<input checked="" type="checkbox"/>	Information Disclosure Statement with Form PTO-1449.
<input checked="" type="checkbox"/>	a copy of the Information Disclosure Statement citation.
<input type="checkbox"/>	preliminary amendment.
<input checked="" type="checkbox"/>	return receipt postcard (MPEP 503), specifically itemized.
<input type="checkbox"/>	applicant claims small entity status under 37 CFR 1.27.
<input type="checkbox"/>	a certified copy of the Priority Document.
<input checked="" type="checkbox"/>	other: Application Data Sheet. This application is filed without a declaration in order to preserve Convention priority.

If a CONTINUING APPLICATION, check appropriate box and supply the requisite informa-
tion.☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No. , filed .

<input checked="" type="checkbox"/>	Customer No. 000466.
<input checked="" type="checkbox"/>	Correspondence address is: YOUNG & THOMPSON, 745 South 23rd Street, Second Floor, Arlington, Virginia 22202.
<input checked="" type="checkbox"/>	Telephone: (703) 521-2297. Telefax: (703) 685-0573 or (703) 979-4709.

UTILITY PATENT APPLICATION TRANSMITTAL LETTER
(continued)

Docket No.
00F00057US

CLAIMS AS FILED

	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE			\$ 710	\$ 710
TOTAL CLAIMS	18 - 20 =	0	x\$ 18	0
INDEPENDENT CLAIMS	6 - 3 =	3	x\$ 80	240
MULTIPLE DEPENDENT CLAIM PRESENT			\$ 270	

TOTAL \$ 950

If applicant has small entity status under 37
CFR 1.9 and 1.27, then divide total fee by 2,
and enter amount here.

**SMALL ENTITY
TOTAL**

\$

☒

A check in the amount of \$950 to cover the filing fee is enclosed.

☒

The Commissioner is hereby authorized to charge indicated fees and credit any over-
payments to Deposit Account No. 25-0120 in the name of Young & Thompson, as
described below. A duplicate copy of this sheet is enclosed.

☒

Charge the amount of \$ as filing fee.

☒

Credit any overpayment.

☐

Charge any additional fee required under 37 CFR 1.16 and 1.17, during
the pendency of this application.

Charge the issue fee set in 37 CFR 1.18 at the mailing of the Notice of
Allowance.



Robert J. Patch
Registration No. 17,355
745 South 23rd Street
Arlington, VA 22202
Telephone 703/521-2297

November 17, 2000

APPLICATION DATA SHEET

Inventor One Given Name:: HIROSHI
 Family Name:: YAMANE
 Postal Address Line One:: C/O TECHNICAL RESEARCH LABORATORIES
 Postal Address Line Three:: KAWASAKI STEEL CORPORATION
 Postal Address Line Four:: 1, KAWASAKICHO, CHUO-KU, CHIBA-SHI
 City:: CHIBA
 Country:: JAPAN
 City of Residence:: CHIBA
 Country of Residence:: JAPAN
 Postal or Zip Code:: 260-0835
 Citizenship Country:: JAPAN

Inventor Two Given Name:: NAGAYASU
 Family Name:: BESSHO
 Postal Address Line One:: C/O TOKYO HEAD OFFICE
 Postal Address Line Two:: KAWASAKI STEEL CORPORATION
 Postal Address Line Three:: HIBIYA KOKUSAI BLDG., 2-3,
 Postal Address Line Four:: UCHISAIWAICHO 2-CHOME, CHIYODA-KU
 City:: TOKYO
 Country:: JAPAN
 City of Residence:: TOKYO
 Country of Residence:: JAPAN
 Postal or Zip Code:: 100-0011
 Citizenship Country:: JAPAN

Inventor Three Given Name:: YUJI
 Family Name:: MIKI
 Postal Address Line One:: C/O TECHNICAL RESEARCH LABORATORIES
 Postal Address Line Three:: KAWASAKI STEEL CORPORATION
 Postal Address Line Four:: KAWASAKIDORI 1-CHOME, MIZUSHIMA,
 Postal Address Line Five:: KURASHIKI-SHI
 City:: OKAYAMA
 Country:: JAPAN
 City of Residence:: OKAYAMA
 Country of Residence:: JAPAN
 Postal or Zip Code:: 712-8074
 Citizenship Country:: JAPAN

Inventor Four Given Name:: SHUJI
 Family Name:: TAKEUCHI
 Postal Address Line One:: C/O TECHNICAL RESEARCH LABORATORIES
 Postal Address Line Two:: KAWASAKI STEEL CORPORATION
 Postal Address Line Three:: 1, KAWASAKICHO, CHUO-KU, CHIBA-SHI
 City:: CHIBA
 Country:: JAPAN
 City of Residence:: CHIBA
 Country of Residence:: JAPAN
 Postal or Zip Code:: 260-0835
 Citizenship Country:: JAPAN

Inventor Five Given Name:: TADASU
 Family Name:: KIRIHARA
 Postal Address Line One:: C/O TECHNICAL RESEARCH LABORATORIES
 Postal Address Line Three:: KAWASAKI STEEL CORPORATION

Postal Address Line Four:: KAWASAKIDORI 1-CHOME, MIZUSHIMA,
Postal Address Line Five:: KURASHIKI-SHI
City:: OKAYAMA
Country:: JAPAN
City of Residence:: OKAYAMA
Country of Residence:: JAPAN
Postal or Zip Code:: 712-8074
Citizenship Country:: JAPAN

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 000466
Name Line One:: YOUNG & THOMPSON
Address Line One:: 745 SOUTH 23RD STREET
Address Line Two:: SECOND FLOOR
City:: ARLINGTON
State or Province:: VIRGINIA
Country:: U.S.A.
Postal or Zip Code:: 22202
Telephone:: 703-521-2297
Fax One:: 703-685-0573
Fax Two:: 703-979-4709

APPLICATION INFORMATION

Title Line One:: METHOD AND APPARATUS FOR CONTINUOUS
Title Line Two:: CASTING OF METALS
Total Drawing Sheets:: 12
Formal Drawings?: YES
Application Type:: UTILITY
Docket Number:: 00F00057US

REPRESENTATIVE INFORMATION

Representative Customer Number:: 000466

PRIOR FOREIGN APPLICATION

Foreign Application One:: 11-138667
Filing Date:: MAY 19, 1999
Country:: JAPAN
Priority Claimed:: NO

Foreign Application Two:: 11-181137
Filing Date:: JUNE 28, 1999
Country:: JAPAN
Priority Claimed:: NO

Foreign Application Three:: 2000-207972
Filing Date:: JULY 10, 2000
Country:: JAPAN
Priority Claimed:: YES

Foreign Application One:: 2000-207973
Filing Date:: JULY 10, 2000
Country:: JAPAN
Priority Claimed:: YES

METHOD AND APPARATUS FOR CONTINUOUS CASTING OF METALS

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a continuous casting method and apparatus for effecting flow control of molten steel using a magnetic field during continuous casting of steel.

2. Description of Related Art

10 In continuous casting, an immersion nozzle is often used to pour a molten metal into a casting mold. If the flow speed of the surface molten metal is too high at that time, mold flux on the surface of the molten metal is entrained (or involved) into a body of the molten metal, and if the flow speed of the surface molten metal is too low, the molten metal stagnates and segregates there, thus
15 finally giving rise to surface segregation. For reducing such surface defects, there is known a method of applying a static magnetic field and/or a moving magnetic field (AC moving magnetic field) to the molten metal in the mold for controlling the flow speed of the molten metal.

20 However, the known method has problems as follows. When a static magnetic field is applied to brake a flow of the molten metal (for electromagnetic braking), segregation tends to occur readily, particularly in a position where the molten metal stagnates. Also, when a moving magnetic field is applied to agitate the molten metal
25 (for electromagnetic agitation), entrainment of the mold flux (flux entrainment) tends to occur readily in a position where the flow speed of the molten metal is high.

To cope with the above problems, several proposals have been

SUMMARY OF THE INVENTION

With the view of breaking through the limits of the related art set forth above, it is an object of the present invention to provide a continuous casting method and apparatus for metals, which can produce a cast slab much less susceptible to flux entrainment, capture of bubbles and non-metal inclusions near the surface of a molten metal, and surface segregation.

As a result of conducting intensive studies, the inventors have made the following findings.

Aspect A of Invention: Application of Non-moving, Vibrating AC Magnetic Field

1) Molten-metal flow control under application of a static magnetic field is very effective in preventing entrainment of mold flux 3 and occurrence of inclusions. However, if the magnetic field is too strong, the flow speed of a molten metal is reduced and surface segregation 5 is caused due to semi-solidification at the surface of the molten metal. (See Fig. 1)

2) Molten-metal flow control under application of a moving magnetic field is able to prevent the surface segregation 5 and capture of foreign matters (bubbles and non-metal inclusions 4) at the solidification interface. With a resulting increase of the flow speed of the molten metal indicated by 2, however, the entrainment of the mold flux 3 is more likely to occur and an amount of the entrained mold flux 3 is apt to increase. (See Fig. 1)

3) A method of applying an electromagnetic force, which induces only vibration without inducing a macro flow, so as to act upon the

molten metal is very effective in preventing the semi-solidification at the surface of the molten metal and the capture of foreign matters at the solidification interface while holding down the flux entrainment. Such an electromagnetic force can be produced by an
5 AC magnetic field which is not moved but only vibrated (hereinafter referred to as a "non-moving, vibrating magnetic field"). Thus, the term "non-moving magnetic field" as used herein connotes magnetic flux alternating in opposite directions, whereas a moving magnetic field connotes a magnetic flux continuing in a single
10 direction.

The present invention according to this aspect A has been accomplished based on the above-mentioned findings.

More particularly, according to this aspect A of the present invention, there is provided a continuous casting method for metals,
15 the method comprising the step of applying a non-moving, vibrating magnetic field to a molten metal in a casting mold to impose only vibration on the molten metal.

The non-moving, vibrating magnetic field is preferably produced by arranging electromagnets, each of which comprises an
20 iron core and a coil wound over the iron core, in an opposing relation on both sides of the mold in the direction of transverse width thereof to lie side by side in the direction of longitudinal width of the mold, and supplying a single-phase AC current to each coil.

The iron core may comprise individual single iron cores
25 separate from each other, or a comb-shaped iron core having a comb-teeth portion over which coils are wound.

The single-phase AC current preferably has frequency of 0.10 to 60 Hz.

Furthermore, a DC magnetic field and an AC magnetic field for producing the non-moving, vibrating magnetic field may be applied in superimposed fashion in the direction of transverse width of the mold.

Aspect B of Invention: Intermittent Application of Static Magnetic Field

1) Molten-metal flow control under application of a static magnetic field is very effective in preventing entrainment of mold flux and intrusion of inclusions. However, if the magnetic field is too strong, the flow speed of a molten metal is reduced and segregation is caused due to solidification at the surface of the molten metal, as shown on the left side of Fig. 6.

2) With molten-metal flow control under application of a moving magnetic field, the flow speed of the molten metal is increased and the flux entrainment is more likely to occur, as shown on the right side of Fig. 6.

In other words, when an area appears in which the molten metal slows down its flow speed and is semi-solidified, segregation occurs in that area and product defects are ultimately caused. Providing a macro flow to the molten metal to avoid the occurrence of segregation, however, promotes the flux entrainment and gives rise to new defects.

3) A method of applying a static magnetic field intermittently is very effective in preventing the semi-solidification at the

surface of the molten metal while holding down the flux entrainment.

According to this aspect B of the present invention, there is provided a continuous casting method for casting a metal while applying a static magnetic field in the direction of thickness of a cast slab, comprising the step of intermittently applying the static magnetic field. Herein, the term "intermittent application" means a process of alternately repeating application (on) of the static magnetic field and no application (off) of the static magnetic field.

Preferably, the static magnetic field is intermittently applied under setting of an on-time $t_1 = 0.10$ to 30 seconds and an off-time $t_0 = 0.10$ to 30 seconds. Also, the static magnetic field is preferably applied to a surface of a molten metal. It is more preferable to employ setting of an on-time $t_1 = 0.3$ to 30 seconds and an off-time $t_0 = 0.3$ to 30 seconds.

According to another aspect of the present invention, when continuous casting is performed by applying a DC magnetic field and an AC magnetic field in superimposed fashion in the direction of transverse width of a casting mold at positions above and below an ejection port of an immersion nozzle immersed in a molten metal in the mold, the AC magnetic field may be moved in a longitudinally symmetrical relation from both ends to the center of the mold in the direction of longitudinal width thereof.

The above method can be implemented by a continuous casting apparatus for molten metals, the apparatus comprising a coil for producing an AC magnetic field moving in a longitudinally

symmetrical relation from both ends to the center of the mold in the direction of longitudinal width thereof, and a coil for producing a DC magnetic field, both the coils being wound over each of common iron cores, the iron cores being arranged on both sides of the mold in the direction of transverse width thereof such that a direction of the magnetic fields produced by the coils is aligned with the direction of transverse width of the mold.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic view for explaining mechanisms that generate flux entrainment, surface segregation, and capture of foreign matters;

Fig. 2 is a schematic view showing a first example of a manner of creating a non-moving, vibrating magnetic field;

Fig. 3 is a schematic view showing a second example of the manner of creating the non-moving, vibrating magnetic field;

Fig. 4 is a schematic view showing one example of a manner of creating a moving magnetic field;

Fig. 5 is a schematic view showing one example of a comb-shaped iron core;

Fig. 6 is a schematic view for explaining mechanisms that generate flux entrainment and surface segregation;

Fig. 7 is a chart illustrating application of a magnetic field according to the present invention;

Fig. 8 is a schematic view showing process parameters of casting with application of a static magnetic field;

Figs. 9A and 9B show one example of an apparatus according to the present invention, wherein Fig. 9A is a schematic sectional plan view and Fig. 9B is a schematic sectional side view;

Fig. 10 is a waveform chart showing one example of a magnetic flux density produced under application of an AC magnetic field alone;

Fig. 11 is a schematic view for explaining molten steel flows occurring under application of an AC magnetic field alone;

Fig. 12 is a waveform chart showing one example of a magnetic flux density produced under application of AC and DC magnetic fields;

Fig. 13 is a schematic view for explaining molten steel flows occurring under application of AC and DC magnetic fields;

Fig. 14 is a schematic sectional plan view showing interference between a circulating flow and an ejected-and-reversed surfacing flow caused by electromagnetic agitation in a meniscus area (the surface of molten steel);

Fig. 15 is a schematic side view showing a flow pattern of molten steel produced based on an ejected molten steel flow under two-step superimposed application of a transversely-symmetrical moving AC magnetic field and a DC magnetic field;

Fig. 16 is a schematic side view showing a flow pattern of molten steel produced based on an ejected molten steel flow under two-step application of a DC magnetic field alone;

Figs. 17A and 17B show another example of an apparatus according to the present invention, wherein Fig. 17A is a schematic sectional plan view and Fig. 17B is a schematic sectional side view;

and

Fig. 18 is a schematic sectional plan view showing interference between a circulating flow and an ejected-and-reversed surfacing flow caused by electromagnetic agitation in the meniscus area.

In the figures, the following reference numerals designate the following components and features:

1. Immersion nozzle
2. Flow speed of the molten metal
3. Mold flux
4. Non-metal inclusions
5. Surface segregation
6. Casting mold
7. Electromagnet
8. Iron core
9. Coil
10. Longitudinal width vibrating flow
11. Transverse width vibrating flow
12. Bulk current
13. Comb-shaped iron core
14. Comb teeth portion
15. Molten surface
16. Electromagnetic coil
17. Solidified shell
18. DC supplied coils
19. AC supplied coils
20. Direction of the DC magnetic field

21. Direction of the AC magnetic field
22. Magnetic poles
23. Molten steel
24. Electromagnetic force
- 5 25. Molten steel flow
26. Non-directional molten steel flow
27. Circulating flow
28. Ejected-and-reversed surfacing flow
29. Vortex
- 10 30. Stagnation
31. Moving AC magnetic field
32. AC/DC electromagnet
33. Immersion nozzle spout
34. DC electromagnet

15

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Aspect A of Invention: "Application of Non-Moving, Vibrating AC Magnetic Field"

With the aspect A of the present invention, a non-moving,
20 vibrating magnetic field is applied to a molten metal in a casting
mold under continuous casting to impose only vibration on the molten
metal. Because of applying a non-moving magnetic field, a bulk flow
(macro flow) of the molten metal is not produced, unlike in the case
of applying a moving magnetic field, and therefore flux entrainment
25 does not readily occur. Also, because of applying a vibrating
magnetic field, minute vibration of the molten metal is generated

in the vicinity of the solidification interface. The generated minute vibration contributes to not only preventing capture of foreign matter (bubbles and non-metal inclusions) by the solidification interface, but also holding down uneven solidification in the vicinity of a meniscus area (the surface of the molten steel) which is responsible for surface segregation.

The non-moving, vibrating magnetic field can be created, by way of example, as shown in Figs. 2 and 3. A number of electromagnets 7, each comprising an iron core 8 and a coil 9 wound around the iron core 8, are arranged on both sides of a casting mold 6 in an opposing relation in the direction of transverse width of the mold to lie side by side in the direction of longitudinal width of the mold, and a single-phase AC current is supplied to each coil 9. Note that numeral 20 in Figs. 2 and 3 denotes a magnetic force line.

In a first example shown in Fig. 2, each pair of opposing coils 9, 9 are wound in the same direction (x, x or y, y), and pair of adjacent coils 9, 9 on the same side of the mold are wound in opposite directions (x, y). A single-phase AC current is then supplied to each of the coils 9 thus wound. Therefore, magnetic forces developed between every two electromagnets 7, 7 arranged adjacent to each other on the same side are reversed in direction repeatedly over time.

As a result, only vibrating flows 10 in the direction of longitudinal width of the mold are induced in the molten metal and no bulk flows are produced.

In a second example shown in Fig. 3, each pair of opposing coils 9, 9 are wound in opposite directions (x, y), and pair of adjacent

coils 9, 9 on the same side are wound in the same direction (x, x or y, y). A single-phase AC current is then supplied to each of the coils 9 thus wound. Therefore, magnetic forces developed between every two opposing electromagnets 7, 7 are reversed in direction repeatedly over time. As a result, only vibrating flows 11 in the direction of transverse width of the mold are induced in the molten metal and no bulk flows are produced.

On the other hand, a moving magnetic field is created, by way of example, as shown in Fig. 4. A number of electromagnets 7, each comprising an iron core 8 and a coil 9 wound over the iron core 8, are arranged on both sides of a casting mold 6 in an opposing relation in the direction of transverse width of the mold to lie side by side in the direction of longitudinal width of the mold, and a three-phase AC current is supplied to each coil 9. Note that letters u, v and w denote different three phases of the three-phase AC current. The left six coils and right six coils are wound in opposite directions (x, y). With the moving magnetic field thus created, magnetic forces are produced in a constant direction (i.e., a direction from one end toward the other end of the mold along the longitudinal width thereof). Accordingly, a bulk current 12 is produced in the molten metal to horizontally circulate along inner walls of the mold 6, and it is difficult to hold down the occurrence of flux entrainment.

While the iron cores of the electromagnets are constructed as individual single iron cores separate from each other in Figs. 2 and 3, this aspect of the present invention may also be implemented by using a comb-shaped iron core 13 as shown in Fig. 5 having comb

0574461-11700
teeth portions 14 over which the coils 9 are fitted. This construction is advantageous in that fabrication of the electromagnets is facilitated because the electromagnets can be fabricated by providing one comb-shaped iron core 13 on each side of the casting mold 6 in the direction of transverse width of the mold and fitting the coils 9 over the comb teeth portions 14 in a one-to-one relation.

Also, in this aspect of the present invention, the single-phase AC current supplied to the coils 9 preferably has frequency of 0.10 - 60 Hz. Setting the frequency to be not lower than 0.10 Hz makes it possible to increase the skin effect, to concentrate the vibration in the vicinity of the solidification interface, and to enhance the effect of preventing the capture of foreign matter.

However, if the frequency exceeds 60 Hz, a vibration urging force is reduced down to a level close to viscosity resistance of the molten metal, whereby vibration of the molten metal is weakened and the effect of preventing the capture of foreign matter is lessened.

According to this aspect of the present invention, as described above, casting of a high-quality metal slab can be achieved which is free from surface segregation, contains less foreign matter (bubbles and non-metal inclusions) captured in the cast slab, and suffers from less flux entrainment.

The electromagnets are preferably disposed in positions close to the surface of the molten metal, but similar advantages can also be obtained even when the electromagnets are disposed in positions lower than the nozzle ejection hole.

EXAMPLES (Tables 1 and 2)

0921481-11200
About 300 tons of ultra low carbon-and-Al killed steel (having a typical chemical composition listed in Table 1) was smelted using the converter - RH process, and a slab being 1500 - 1700 mm wide and 220 mm thick was cast by pouring the molten killed steel into a casting mold at a rate of 4 - 5 ton/min from an immersion nozzle with a continuous casting machine. In this slab casting step, experiments were conducted by arranging electromagnets in each of the layouts shown in Figs. 2 to 4 at a level corresponding to the position of the molten steel surface, and supplying a three- or single-phase AC current of various frequencies to a coil of each electromagnet, thereby applying a moving magnetic field or a non-moving, vibrating magnetic field with a magnetic flux density of 0.1 T, or applying no magnetic field.

15 In the experiments, three characteristics, i.e., surface segregation, flux-based surface defects, and a bubble/-inclusion amount, were measured for each condition of applying the magnetic field in accordance with the following procedures.

Surface Segregation: After grinding the cast slab, the slab was subjected to etching and the number of segregates per 1 m^2 was counted by visual observation.

Flux-based Surface Defects: Surface defects in a coil obtained after cold rolling of the cast slab were visually observed, and after picking a defective sample, the number of defects caused by entrainment of mold flux was counted by analyzing the defects.

Bubble/Inclusion Amount: Non-metal inclusions were extracted by

the slime extracting process from a portion of the cast slab at a position corresponding to a 1/4 thickness thereof, and the weight of the extracted inclusions was measured (the number of bubbles was measured by slicing a surface layer of the cast slab and counting the number of bubbles observed with a transmitted X ray).

The experimental results are listed in Table 2 along with the conditions of applying the magnetic field. Note that evaluation values of the above three items are each represented in terms of an index (numerical value obtained by multiplying a ratio of the measured data to the worst data among all the conditions by 10).

As seen from Table 2, in Examples according to this aspect of the present invention in which the non-moving, vibrating magnetic field was applied, the surface segregation, the defects caused by the flux entrainment, and the amount of bubbles and non-metal inclusions could be all remarkably reduced.

In Example 1, since the frequency was too low, i.e., 0.05 Hz, a macro flow was partly induced in the molten steel and the flux-based surface defects were increased to some extent. Also, in Example 8, since the frequency was too high, i.e., 65 Hz, the vibration was weakened and the number of bubbles and inclusions was increased to some extent.

A description will now be made of a modification of this aspect of the present invention in which a DC magnetic field and an AC magnetic field for producing a non-moving, vibrating magnetic field are applied in superimposed fashion in the direction of transverse width of a casting mold.

094434-14200

In Figs. 9A and 9B, coils (DC supplied coils) 18, to which a DC current is supplied to produce DC magnetic fields (equivalent to static magnetic fields), and coils (AC supplied coils) 19, to which an AC current is supplied to produce fixed AC magnetic fields, are wound over a common iron core 8 as shown. Two iron cores 8 are disposed to extend respectively along outer surfaces of long sides of a casting mold 6 such that directions of the magnetic fields (i.e., directions 20 of the DC magnetic fields and directions 21 of the AC magnetic fields) are aligned with the direction of transverse width of the mold, and one or more (six on each of the upper and lower sides in the illustrated apparatus) pairs of magnetic poles 22 are positioned to face each other above and below an ejection port of an immersion nozzle 1. A single- or three-phase AC current is supplied to each of the AC supplied coils 19 which are arranged to lie side by side in the direction of longitudinal width of the casting mold 6.

In the magnetic field produced by the single-phase AC current, the phase of a waveform representing an intensity distribution in the direction of longitudinal width of the mold (positions of hills and valleys of the distribution) is not changed over time (that is to say, a wave does not move in the direction of longitudinal width of the mold). On the other hand, the so-called conventionally employed moving magnetic field is produced by arranging AC supplied coils in division to three sets and supplying three-phase AC currents to the three sets of coils with different phases from each other.

In a magnetic field thus produced, the phase of a waveform

representing an intensity distribution in the direction of longitudinal width of the mold is changed over time. Thus, the fixed AC magnetic field employed in the present invention means an AC magnetic field in which a wave does not move in a certain direction, unlike the conventionally employed moving magnetic field (moving AC magnetic field). Even with the use of a multi-phase AC current, it is also possible to produce an AC magnetic field, in which a wave does not move in a certain direction, by arranging the coils in a proper layout.

As shown in Fig. 11, when a single AC magnetic field providing a magnetic flux density as represented by a waveform shown in Fig. 10, by way of example, is applied by the AC supplied coil 19 in the direction of transverse width of the mold (the direction 21 of the AC magnetic field), an electromagnetic force (pinching force) 24 with a magnitude varying periodically acts upon a molten steel 23 and gives rise to a molten steel flow 25. In this case, however, the applied magnetic field is attenuated by an induction current magnetic field generated by mold copper plates, etc. Accordingly, the magnetic flux density produced within the mold is only on the order of about several hundred Gauss, and it is difficult to increase the electromagnetic force 24.

On the other hand, as shown in Fig. 13, when an AC and DC superimposed magnetic field providing a magnetic flux density as represented by a waveform shown in Fig. 12, by way of example, is applied by the AC supplied coil 19 and the DC supplied coil 18 in the direction of transverse width of the mold (the direction 21 of

the AC magnetic field and the direction 20 of the DC magnetic field), the magnetic flux density produced within the mold can be increased to a level of several thousands Gauss and the electromagnetic force 24 can also be increased.

5 An AC component of the electromagnetic force (i.e., an electromagnetic pumping force) causes disorder in the molten steel flow 25, whereby movement of heat and material is activated and the Washing effect is also promoted. Since an AC magnetic field is gradually attenuated due to the skin effect as it approaches the
10 interior of a material, the electromagnetic pumping force is relatively large near a widthwise surface a solidified shell, but relatively small near the center of the molten steel in the direction of transverse width of the mold. A DC magnetic field is hardly attenuated across the overall transverse width of the mold. Near
15 the center of the molten steel in the direction of transverse width of the mold, therefore, a DC component of the electromagnetic force (i.e., an electromagnetic braking force) acting to brake the molten steel prevails over the periodically varying component that is attenuated there. As a result, it is possible to attenuate flows
20 branched from an ejected flow to move upward and downward, and at the same time to activate the molten steel flow near the widthwise surface of the solidified shell. In addition, because of employing the fixed AC magnetic field in which a wave does not move in the direction of transverse width of the mold, the molten steel flow
25 in a meniscus area near long walls of the casting mold 6 becomes a non-directional molten steel flow 26 that moves in random

09714161-111700
directions, as shown in Fig. 9. This prevents generation of a circulating flow 27, shown in Fig. 14, that moves along the periphery of the casting mold 6. Hence, neither vortex 29 nor stagnation 30 is produced due to collision between the circulating flow 27 and an ejected-and-reversed surfacing flow 28 from the immersion nozzle 1, thus resulting in a remarkable reduction of such disadvantages as the entrainment of flux powder with the vortex and the capture of inclusions by the solidified shell in the stagnation.

In order to sufficiently develop the above-mentioned effects, the AC and DC superimposed magnetic field is preferably applied from one or more pairs of magnetic poles 22 disposed in an opposing relation above and/or below the ejection port of the immersion nozzle 1, as shown in Fig. 9. Applying the AC and DC superimposed magnetic field above the ejection port of the immersion nozzle 1 can hold down the occurrence of the vortex and stagnation in the meniscus area, and applying it below the ejection port of the immersion nozzle 1 can promote braking against the downward flow from the immersion nozzle 2 and enlarge the range within which the Washing effect exerts.

Furthermore, by arranging the magnetic poles in an opposing relation, the magnetic field can be symmetrically applied from both the sides of the casting mold in the direction of transverse width of the mold. Still further, by arranging one or more pairs of the magnetic poles, the molten steel flow is disordered near the widthwise surface of the solidified shell more evenly in the direction of longitudinal width of the mold, and the Washing effect can be developed thoroughly in the direction of longitudinal width

of the mold with more ease.

From the standpoint of apparatus construction, the AC supplied coils 19 and the DC supplied coil 18 are preferably wound over the same iron core 8, as shown in Fig. 9, for ease in positioning of the applied magnetic fields, aligned application of the AC and DC superimposed magnetic field to the desired positions, and independent adjustment of DC and AC components of the superimposed magnetic field. Additionally, the AC supplied coils 19 are each preferably wound over one of a plurality of magnetic poles 22 which are formed by branching a front end portion of the iron core 8 into the shape of comb teeth, whereas the DC supplied coil 18 may be wound over a root (referred to as a "common pole") in common to the magnetic poles 22 formed side by side in the shape of comb teeth at the front end portion of the iron core 8.

Also, in the modification of this aspect of the present invention, the AC magnetic field preferably has frequency of 0.01 - 50 Hz. If the frequency is lower than 0.01 Hz, the intensity of a produced electromagnetic force becomes insufficient, and if the frequency exceeds 50 Hz, it is difficult for the molten metal flow to follow changes of the electromagnetic force. In any case, it is difficult to make the molten metal flow disordered satisfactorily near the widthwise surface of the solidified shell.

EXAMPLE (Table 3)

A strand of low carbon-and-Al killed steel being 1500 mm wide and 220 mm thick was cast by pouring the molten killed steel at a casting rate of 1.8 m/min and 2.5 m/min and an immersion nozzle

ejection angle of 15° downward from the horizontal with a continuous casting machine of the vertical bending type. In this casting step, experiments were conducted by employing the apparatus shown in Fig. 9, and applying magnetic fields to a portion of the strand corresponding to the mold position under various conditions of applying the magnetic fields as listed in Table 3. A cast slab was subjected to measurement of a surface defect index determined by inspecting surface defects of a steel plate after being rolled, and a machining crack index determined by inspecting inclusion-based machining cracks caused during pressing of a steel plate. The surface defect index and the machining crack index are each defined as an index that takes a value of 1.0 when electromagnetic flow control is not carried out.

In table 3, in each pole to which a moving AC magnetic field was applied, AC supplied coils were arranged in division to three sets so as to provide a moving-magnetic-field pole pitch of 500 mm, and three-phase AC currents were supplied to the three sets of coils with different phases from each other. In each pole to which a fixed AC magnetic field was applied, a single-phase AC current was supplied to each of AC supplied coils wound over the respective magnetic poles, and the phase of a magnetic flux density was set to the same for each magnetic pole. Also, in Table 3, the intensity of the AC magnetic field is represented by an effective value of the magnetic flux density at an inner surface position of a mold copper plate when the AC magnetic field is solely applied, and the intensity of the DC magnetic field is represented by a value of the magnetic flux

density at the center of the cast slab in the direction of thickness thereof when the DC magnetic field is solely applied. The pole, in which the intensities of both the AC and DC magnetic fields are not 0 T, represents a pole to which the AC and DC superimposed magnetic field was applied. As shown in Table 3, the conditions 1 to 5 represent Comparative Examples departing from the scope of the present invention, and the condition 6 represents Example falling within the scope of the present invention.

Measurement results of the surface defect index and the machining crack index are also listed in Table 3. Note that the measured result is expressed by an average of two values measured for two different casting rate conditions.

In the Comparative Examples of Table 3, the DC magnetic field and the moving magnetic field (moving AC magnetic field) were applied solely or in superimposed fashion. When only the DC magnetic field was applied, supply of the molten steel heat was insufficient and a claw-like structure grew in an initially solidified portion. The claw-like structure catches flux powder and increased the surface defect index. When only the moving magnetic field was applied, growth of the claw-like structure could be held down, but the electromagnetic braking force was so small that inclusions intruded into a deeper area of a not-yet-solidified molten steel bath within the cast slab. In addition, a vortex and stagnation were caused in the meniscus area upon collision between the circulating flow along the periphery of the casting mold and the ejected-and-reversed surfacing flow. The intrusion of inclusions into the deeper area

of the not-yet-solidified molten steel bath within the cast slab increased the machining crack index. The vortex brought about entrainment of flux powder, and the stagnation promoted the capture of inclusions by the solidified shell. Any of the vortex and the stagnation increased the surface defect index. By superimposing the DC magnetic field on the moving magnetic field, the inclusions could be avoided from intruding into the deeper area of the not-yet-solidified molten steel bath, but the occurrence of vortex and stagnation could not be avoided. Under the best condition 5 among the Comparative Examples in which the moving magnetic field and the DC magnetic field were applied to both upper and lower poles, therefore, the machining crack index was reduced down to 0.1, but the surface defect index still remained as high as 0.2.

By contrast, the Example of Table 3 employed the condition 6 in which the fixed AC magnetic field was applied instead of the moving magnetic field employed in the condition 5. Under the condition 6, the electromagnetic pumping force was caused to act upon the widthwise surface of the solidified shell to enhance the Washing effect, and the electromagnetic braking force was caused to act upon a central portion of the cast slab in the direction of thickness thereof to reduce the flow speeds of the molten steel flows (upward and downward flows branched from the ejected flow) and to promote creation of laminar flows. Furthermore, generation of the circulating flow in the meniscus area could be held down, and the vortex and stagnation were avoided from being produced there. As a result, both the surface defect index and the machining crack index

could be reduced down to 0.05 that was not obtained with Comparative Examples.

Aspect B of Invention: "Application of Intermittent Static Magnetic Field"

5 In this aspect of the present invention, casting is performed while applying a static magnetic field in the direction of longitudinal width of a casting mold to prevent the flux entrainment, but the static magnetic field is intermittently applied by turning on/off application of the magnetic field in an alternate manner, as shown in Fig. 7, rather than continuously applying a constant magnetic field in steady fashion (holding an on-state). In Fig. 10 7, an on-time is represented by t_1 and an off-time is represented by t_2 .

By so intermittently applying the static magnetic field, the vector of an eddy current generated in an acting area of the magnetic field is greatly changed upon the on/off switching, and a micro flow of a molten metal is produced in the acting area. The produced micro flow contributes to preventing semi-solidification of the molten metal near the surface thereof, and to almost completely eliminate the occurrence of surface segregation.

15 With this aspect of the present invention, therefore, both the flux entrainment and the surface segregation can be prevented, but the degree of the resulting effect depends on how the on-time t_1 and the off-time t_0 are set. More specifically, if t_0 and t_1 are too short, the applied magnetic field becomes close to a state resulting from application of an AC magnetic field, whereby the flow

speed of the surface molten metal cannot be reduced satisfactorily and the flux entrainment is caused. If t_0 is too long, the flow speed of the molten metal is increased and the effect of effecting the flux entrainment becomes insufficient. Also, if t_1 is too long, the flow speed of the molten metal is so reduced that the surface segregation is noticeable.

Experiments were conducted to determine the ranges of t_0 and t_1 in which both the flux entrainment and the surface segregation could be reduced satisfactorily. As a result, $t_0 = 0.10 - 30$ seconds and $t_1 = 0.10 - 30$ seconds were obtained. Thus, in this aspect of the present invention, the magnetic field is preferably intermittently applied under condition of $t_0 = 0.10 - 30$ seconds and $t_1 = 0.10 - 30$ seconds. More preferably, t_0 and t_1 are set to satisfy $t_0 = 0.3 - 30$ seconds and $t_1 = 0.3 - 30$ seconds.

Furthermore, the advantages of this aspect of the present invention are obtained most remarkably when the static magnetic field is applied to the surface of the molten metal. It is therefore preferable to apply the static magnetic field to the surface of the molten metal. Even when the static magnetic field is applied to the interior of the molten metal, however, similar advantages can also be obtained so long as an influence of the static magnetic field is transmitted to the surface flow of the molten metal through an internal flow of the molten metal.

According to this aspect of the present invention, as described above, casting of a high-quality metal slab can be achieved which is free from the surface segregation and suffers from the flux

entrainment at a less degree.

EXAMPLES (Tables 4 and 5)

About 300 tons of ultra low carbon-and-Al killed steel (having a typical chemical composition listed in Table 4) was smelted using the converter - RH process, and a slab being 1500 - 1700 mm wide and 220 mm thick was cast by pouring the molten killed steel into a casting mold 6 at a rate of 4 - 5 ton/min from an immersion nozzle 1 with a continuous casting machine, as shown in Fig. 8. In this slab casting step, experiments were conducted by arranging electromagnetic coils 16 on both sides of the mold 6 in an opposing relation at a level corresponding to the position of a surface 15 of the molten steel, and applying a static magnetic field in the direction of transverse width of the mold (direction perpendicular to the drawing sheet of Fig. 8) under various conditions with a maximum magnetic flux density of 0.3 T.

In the experiments, three characteristics, i.e., surface segregation, flux-based surface defects, and a bubble/-inclusion amount, were measured for each condition of applying the static magnetic field in accordance with the following procedures.

Surface Segregation: After grinding the cast slab, the slab was subjected to etching and the number of segregates per 1 m^2 was counted by visual observation.

Flux-based Surface Defects: Surface defects in a coil obtained after cold rolling of the cast slab were visually observed, and after picking a defective sample, the number of defects caused by entrainment of mold flux was counted by analyzing the defects.

Inclusion Amount: Inclusions were extracted by the slime extracting process from a portion of the cast slab at a position corresponding to a 1/4 thickness thereof, and the weight of the extracted inclusions was measured.

5 The experimental results are listed in Table 5 along with the conditions of applying the static magnetic field. Note that evaluation values of the above three items are each represented in terms of an index (numeral value obtained by multiplying a ratio of the measured data to the worst data among all the conditions by 10) .

10 As seen from Table 5, in the Examples according to this aspect of the present invention in which the static magnetic field was intermittently applied, the surface segregation was not observed, and both the flux-based surface defects and the inclusion amount were reduced. Among these Examples, in Examples 1 and 4 -7 in which 15 the on-time t_1 was set to be in the range of 0.10 to 30 seconds, both the flux-based surface defects and the inclusion amount were further reduced. Furthermore, in the Comparative Examples of Table 5 in which the static magnetic field was applied at the constant 20 strength, there occurred a contradiction that when the intensity of the static magnetic field is increased, both the flux-based surface defects and the inclusion amount were reduced, but the surface segregation was increased. By contrast, in the Examples of Table 5, such a contradiction did not occur, and the surface 25 segregation, the flux-based surface defects and the inclusion amount were all reduced.

Another Aspect of Invention

An AC magnetic field may be moved in a longitudinally symmetrical relation from both ends toward the center of a casting mold in the direction of longitudinal width thereof.

5 With this other aspect of the present invention, similarly to the above-described aspect, an AC and DC superimposed magnetic field is applied to a molten metal at two positions (in two steps) spaced in the casting direction (direction of height of a casting mold) so as to spread in the direction of thickness of a cast slab (direction of short side (transverse width) of the mold). However, this other aspect of the present invention differs from the above-described aspect in producing a moving AC magnetic field and from the conventional method in direction of movement of an AC magnetic field.

10 More specifically, in the conventional method, the AC magnetic field is moved from one end toward the other end of the mold in the direction of width of the cast slab (direction of long side (longitudinal width) of the mold). By contrast, with this aspect of the present invention, the AC magnetic field is moved in a longitudinally symmetrical relation from both ends toward the center of the mold in the direction of longitudinal width thereof. In the case of moving the AC magnetic field similarly to the conventional method, a horizontal circulating flow along the periphery of the casting mold is generated, as shown in Fig. 14, even when a DC magnetic field is superimposed on the AC magnetic field. Therefore, the occurrence of a vortex and stagnation due to collision between the circulating flow and an ejected-and-reversed surfacing flow cannot

be prevented, which makes it difficult to prevent entrainment of flux powder at the surface of the molten metal and capture of bubbles and inclusions by a widthwise surface of a solidified shell.

With this aspect of the present invention, since the AC magnetic field is moved in a longitudinally symmetrical relation about the center of the mold in the direction of longitudinal width thereof, the above-mentioned circulating flow is not produced and there is nothing against which the ejected-and-reversed surfacing flow collides. Accordingly, neither vortex nor stagnation is produced. Flows moving from both longitudinal ends of the mold under urging by the AC magnetic field (longitudinally-symmetrical moving AC magnetic field) join with each other at the longitudinal center of the mold, but the joined flow is maintained in a laminar state and streams such that a flow near the surface (meniscus) of the molten metal descends and a flow below an ejection port of an immersion nozzle ascends. Such a behavior was confirmed based on experiments and calculations (see Figs. 15 and 16).

Furthermore, on the surface side of the molten metal in the direction of thickness of cast slab (near the widthwise surface of the solidified shell), the AC magnetic field develops due to the skin effect an agitating force prevailing over a braking force developed by the DC magnetic field, thereby activating the flow in such an area and preventing the capture of bubbles and inclusions into the cast slab. On the other hand, on the central side of the molten metal in the direction of thickness of cast slab, the agitating force developed by the AC magnetic field is attenuated

and the braking force developed by the DC magnetic field acts primarily. Accordingly, flows (upward and downward flows branched from the ejected flow) in a central area are damped, whereby disorder of the flow speed of the surface molten metal is held down and entrainment of flux powder is avoided. At the same time, the flow speed of the downward flow is reduced and large-sized inclusions are prevented from intruding into a deeper area.

In this aspect of the present invention, the AC magnetic field preferably has frequency of 0.1 - 10 Hz. If the frequency is lower than 0.1 Hz, it is difficult to produce a molten metal flow enough to develop the Washing effect along the widthwise surface of the solidified shell. Conversely, if the frequency exceeds 10 Hz, the applied AC magnetic field is attenuated by mold copper plates, and hence it is also difficult to produce a molten metal flow enough to develop the Washing effect along the widthwise surface of the solidified shell.

Figs. 17A and 17B show one example of an apparatus suitable for implementing the above-described method according to this aspect of the present invention; Fig. 17A is a schematic sectional plan view and Fig. 17B is a schematic sectional side view. In the apparatus, a pair of electromagnets 7 for both AC and DC currents are arranged in an opposing relation on both sides of a casting mold 6 in the direction of transverse width thereof with an immersion nozzle 1 placed within the mold 6.

An iron core (yoke) 8 of each AC/DC electromagnet 32 has magnetic poles spaced in the vertical directions. Upper and lower

and the root of the same magnetic pole, it is possible to accurately set positions to which the AC and DC superimposed magnetic field is applied, and easily adjust the intensity of frequency of each of the AC and DC magnetic fields independently.

5 From the standpoint of making the molten metal flow more uniform near a widthwise surface of a solidified shell 17 in the direction of width of the cast slab, the number of branches formed in the front end portion of each magnetic pole is preferably set depending on the width of the cast slab.

10 Further, from the standpoint of evenly activating the molten metal flow near the widthwise surface of the solidified shell 17 over the entire width of the cast slab, the AC/DC electromagnets are preferably disposed so as to cover the entire width of the cast slab as illustrated.

15 EXAMPLE (Table 6)

A strand of low carbon-and-Al killed steel being 1500 mm wide and 220 mm thick was cast by pouring the molten killed steel at a casting rate of 1.8 m/min and 2.5 m/min and an immersion nozzle ejection angle of 15° downward from the horizontal with a continuous casting machine of the vertical bending type. In this casting step, experiments were conducted by employing the same apparatus as shown in Fig. 17, and applying magnetic fields to a portion of the strand corresponding to the mold position under various conditions of applying the magnetic fields as listed in Table 6. A cast slab was subjected to measurement of a surface defect index determined by inspecting surface defects of a steel plate after being rolled, and

004451 11400
a machining crack index determined by inspecting inclusion-based
machining cracks caused during pressing of a steel plate. The
surface defect index and the machining crack index are each defined
as an index that takes a value of 1.0 when electromagnetic flow
5 control is not carried out.

10 In Table 6, in each magnetic pole represented by the moving
type A, different phases of the three-phase AC supplied to the AC
coils in Fig. 17 were arranged in the order of the U, V, W, U, V
and W phase successively from the left end in the direction of
longitudinal width of the mold instead of the arrangement shown Fig.
17 so as to produce the horizontal circulating flow in the molten
steel as with the conventional method. A thus-produced AC magnetic
field (referred to as a type-A AC magnetic field; corresponding to
the conventional moving magnetic field) was moved from one end to
15 the other end of the mold in the direction of longitudinal width
thereof. On the other hand, in each magnetic pole represented by
the moving type B, different phases of the three-phase AC supplied
to the AC coils were arranged in a longitudinally symmetrical
relation in the direction of longitudinal width of the mold as shown
20 Fig. 17 so as to produce the flows in the molten steel moving from
both the ends to the center of the mold in the direction of
longitudinal width thereof in accordance with this aspect of the
present invention. A thus-produced AC magnetic field (referred to
as a type-B AC magnetic field) was moved in a longitudinally
25 symmetrical relation from both the ends to the center of the mold
in the direction of longitudinal width thereof.

Also, in Table 6, the intensity of the AC magnetic field is represented by an effective value of the magnetic flux density at an inner surface position of a mold copper plate when the AC magnetic field is solely applied, and the intensity of the DC magnetic field is represented by a value of the magnetic flux density at the center of the cast slab in the direction of thickness thereof when the DC magnetic field is solely applied. The magnetic pole, in which the intensities of both the AC and DC magnetic fields are not 0 T, represents a pole to which the AC and DC superimposed magnetic field was applied. As shown in Table 6, the conditions 1 to 5 represent Comparative Examples departing from the scope of the present invention, and the condition 6 represents Example falling within the scope of the present invention.

Measurement results of the surface defect index and the machining crack index are also listed in Table 6. Note that the measured result is expressed by an average of two values measured for two different casting rate conditions.

In Comparative Examples, the type-A AC magnetic field and the DC magnetic field were applied solely or in superimposed fashion.

When only the DC magnetic field was applied, supply of the molten steel heat was insufficient and a claw-like structure grew in an initially solidified portion. The claw-like structure catches flux powder and increased the surface defect index. When only the type-A AC magnetic field was applied, growth of the claw-like structure could be held down, but the electromagnetic braking force was so small that inclusions intruded into a deeper area of a not-yet-

0921461-11300

solidified molten steel bath within the cast slab. In addition, a vortex and stagnation were caused in the meniscus area upon collision between the circulating flow along the periphery of the casting mold and the ejected-and-reversed surfacing flow. The intrusion of inclusions into the deeper area of the not-yet-solidified molten steel bath within the cast slab increased the machining crack index. The vortex brought about entrainment of flux powder, and the stagnation promoted the capture of inclusions by the solidified shell. Any of the vortex and the stagnation increased the surface defect index. By superimposing the DC magnetic field on the type-A AC magnetic field, the inclusions could be avoided from intruding into the deeper area of the not-yet-solidified molten steel bath, but the occurrence of vortex and stagnation could not be avoided. Under the best condition 5 among Comparative Examples in which the type-A AC magnetic field and the DC magnetic field were applied to both upper and lower poles, therefore, the machining crack index was reduced down to 0.1, but the surface defect index still remained as high as 0.2.

By contrast, the Example of Table 6 employed the condition 6 in which the type-B AC magnetic field was applied (frequency was changed from 2 Hz to 5 Hz for optimization) instead of the type-A AC magnetic field employed in the condition 5. Under the condition 6, the Washing effect along the widthwise surface of the solidified shell was enhanced, and the electromagnetic braking force was caused to act upon a central portion of the cast slab in the direction of thickness thereof to reduce the flow speeds of the molten steel flows

(upward and downward flows branched from the ejected flow) and to promote creation of laminar flows. Further, generation of the circulating flow in the meniscus area could be held down, and the vortex and stagnation were avoided from being produced there. As a result, both the surface defect index and the machining crack index could be reduced down to 0.05 that was not obtained with the Comparative Examples.

With the above-described aspects of the present invention, in the continuous casting process of steel, the upward and downward flows branched from the ejected flow can be damped, and at the same time the molten steel flow along the widthwise surface of the solidified shell can be activated. In addition, a vortex and stagnation can be prevented from being caused upon collision between the circulating flow created by electromagnetic agitation and the ejected-and-reversed surfacing flow in the meniscus area.

Therefore, a cast slab having even higher quality can be produced.

Thus, the present invention can provide the following superior advantages. A metal slab can be cast which is much less susceptible to bubbles and non-metal inclusions captured in the cast slab, surface segregation, as well as surface defects and internal inclusions attributable to mold flux. Hence, a high-quality metal product can be produced.

While the present invention has been described above in connection with several preferred embodiments, it is to be expressly understood that those embodiments are solely for illustrating the invention, and are not to be construed in a limiting sense. After

reading this disclosure, those skilled in this art will readily envision insubstantial modifications and substitutions of equivalent materials and techniques, and all such modifications and substitutions are considered to fall within the true scope of the appended claims.

Table 1

C	Si	Mn	P	S	Al	Ti
0.0015	0.02	0.08	0.015	0.004	0.04	0.04

Table 2

	Magnetic Flux Density at Widthwise Center (T)	Layout of Electro- magnets	Type of AC Current	Frequency (Hz)	Surface Segrega- tion Index (-)	Flux-based Defect Index (-)	Bubble/Inclu- sion Amount Index (-)	Overall Evalua- tion
Comparative Example 1	0	-	-	-	10	10	10	x
Comparative Example 2	0	-	-	-	7.0	9.5	9.5	x
Comparative Example 3	0.1	Fig. 4	Three Phase	5	0	5.1	2.5	x
Comparative Example 4	0.1	Fig. 4	Three Phase	10	0	8.0	3.2	x
Comparative Example 5	0.1	Fig. 4	Three Phase	20	0	9.5	2.8	x
Example 1	0.1	Fig. 2	Single Phase	0.05	0	3.9	1.4	A
Example 2	0.1	Fig. 2	Single Phase	0.10	0	3.1	1.0	O
Example 3	0.1	Fig. 2	Single Phase	5	0	3.2	1.2	O
Example 4	0.1	Fig. 2	Single Phase	60	0	0.2	0.9	O
Example 5	0.1	Fig. 3	Single Phase	5	0	0.2	0.6	O
Example 6	0.1	Fig. 3	Single Phase	20	0	0.1	0.5	O
Example 7	0.1	Fig. 3	Single Phase	60	0	0.2	0.8	O
Example 8	0.1	Fig. 3	Single Phase	65	0	3.2	3.0	A

Table 3

Magnetic Field Applying Conditions														Steel Plate Examination Results		Remarks
Upper Pole						Lower Pole						Surface Defect Index	Machining Crack Index			
AC Magnetic Field			DC Magnetic Field			AC Magnetic Field			DC Magnetic Field							
No.	Intensity	Frequency	Intensity	Type	Intensity	Frequency	Intensity									
1	0T	-	0.3T	-	0T	-	0.3T	0.3	0.2	Comparative Example						
2	0.08T	2 Hz	0T	-	0T	-	0.3T	0.3	0.2	Comparative Example						
3	0.08T	2 Hz	0.3T	-	0T	-	0T	0.2	0.3	Comparative Example						
4	0.08T	2 Hz	0.3T	-	0T	-	0.3T	0.2	0.2	Comparative Example						
5	0.08T	2 Hz	0.3T	Moving	0.08T	2 Hz	0.3T	0.2	0.1	Comparative Example						
6	0.08T	5 Hz	0.3T	Fixed	0.08T	5 Hz	0.3T	0.05	0.05	Example						

Moving Type: 500 mm pole pitch of moving magnetic field ; supply of three-phase AC current

Fixed Type : supply of single-phase AC current

Table 4

(%)

C	Si	Mn	P	S	Al	Ti
0.0015	0.02	0.08	0.015	0.004	0.04	0.04

Table 5

	Magnetic Flux Density at Widthwise Center (T)	t0 (sec)	t1 (sec)	Surface Segregation Index (-)	Flux-bas ed Defect Index (-)	Inclusion Amount Index (-)
Comparative Example 1	0	0	-	3.2	10	10
Comparative Example 2	0	0	-	3.0	9.5	9.5
Comparative Example 3	0.1	0	-	6	5.1	7.5
Comparative Example 4	0.2	0	-	7.5	2.5	4.5
Comparative Example 5	0.3	0	-	10	1.1	2.8
Example 1	0.3	0.05	0.05	0	4.2	2.2
Example 2	0.1	0.10	0.15	0	3.1	1.0
Example 3	0.1	2	2	0	3.2	1.5
Example 4	0.3	10	7	0	0.2	0.5
Example 5	0.3	10	5	0	0.2	0.6
Example 6	0.3	30	20	0	0.1	0.5
Example 7	0.3	20	30	0	0.2	0.8
Example 8	0.3	30	32	0	3.2	3.0

WHAT IS CLAIMED IS:

1. A method of continuously casting metals, comprising applying a non-moving, vibrating magnetic field to a molten metal in a casting mold to impose only vibration on the molten metal.

2. The method according to Claim 1, wherein said non-moving, vibrating magnetic field is produced by arranging electromagnets, each of which comprises an iron core and a coil wound over the iron core, in a facing relation on opposite sides of said mold along a transverse width thereof to lie side by side along a longitudinal width of said mold, and supplying a single-phase AC current to each coil.

3. The method according to Claim 1, wherein said iron core comprises individual single iron cores separate from each other, or a comb-shaped iron core having a comb-teeth portion over which coils are wound.

4. The method according to Claim 1, wherein said single-phase AC current has frequency of 0.10 to 60 Hz.

5. The method according to Claim 2, wherein said single-phase AC current has frequency of 0.10 to 60 Hz.

6. The method according to Claim 3, wherein said single-phase AC

current has frequency of 0.10 to 60 Hz.

7. An apparatus for continuous casting of molten metals, the molten metal being continuously cast using a casting mold, said apparatus comprising:

means for applying a non-moving, vibrating magnetic field to the molten metal in said mold to impose only vibration on the molten metal;

electromagnets each comprising an iron core and a coil wound over said iron core, said electromagnets being arranged in a facing relation on opposite sides of said mold along a transverse width thereof to lie side by side along a longitudinal width of said mold; and

means for supplying a single-phase AC current of 0.10 to 60 Hz to each coil.

8. The apparatus according to Claim 7, wherein said iron core comprises individual single iron cores separate from each other, or a comb-shaped iron core having a comb-teeth portion over which the coils are wound.

9. The method according to Claim 1, wherein a DC magnetic field and an AC magnetic field for producing said non-moving, vibrating magnetic field are applied in superimposed fashion along a transverse width of said mold.

10. The method according to Claim 9, wherein the superimposed

magnetic field is applied from at least one pair of magnetic poles arranged to face each other above or/and below an ejection port of an immersion nozzle.

11. An apparatus for continuous casting of molten metals, the molten metal being continuously cast using a casting mold, said apparatus comprising:

a coil supplied with a DC current for producing a DC magnetic field and a coil supplied with an AC current for producing a non-moving, vibrating magnetic field, both said coils being wound over each of common iron cores,

said iron cores being arranged around said mold such that a direction of the magnetic fields produced by said coils is aligned with a transverse width of said mold.

12. The apparatus according to Claim 11, wherein magnetic poles of said iron core are arranged in at least one pair to face each other above or/and below an ejection port of an immersion nozzle.

13. A method for continuous casting of metals, comprising intermittently applying a static magnetic field in a thickness direction of a cast slab.

14. The method according to Claim 13, wherein said static magnetic field is intermittently applied under setting of an on-time $t_1 = 0.10$ to 30 seconds and an off-time $t_0 = 0.10$ to 30 seconds.

0934461 11300

15. The method according to Claim 13, wherein said static magnetic field is applied to a surface of a molten metal.

16. The method according to Claim 14, wherein said static magnetic field is applied to a surface of a molten metal.

17. A method for continuous casting of metals, comprising the steps of:

applying a DC magnetic field and an AC magnetic field in superimposed fashion along a transverse width of a casting mold at positions above and below an ejection port of an immersion nozzle; and

moving said AC magnetic field in a longitudinally symmetrical relation from opposite ends to a center of said mold along a longitudinal width thereof.

18. An apparatus for continuous casting of molten metals, the molten metal being continuously cast using a casting mold, said apparatus comprising:

means for applying magnetic fields at positions above and below an ejection port of an immersion nozzle; and

a first coil for producing an AC magnetic field moving in a longitudinally symmetrical relation from opposite ends to a center of said mold along a longitudinal width thereof, and a second coil for producing a DC magnetic field, both said first and second coils being wound over

each of common iron cores,

said iron cores being arranged on opposite sides of said mold along a transverse width thereof such that a direction of the magnetic fields produced by said coils is aligned with the transverse width of said mold.

ABSTRACT OF THE DISCLOSURE

During continuous casting of metals, a non-moving, vibrating magnetic field is applied to a molten metal in a casting mold to impose only vibration on the molten metal. This continuous casting method can produce a cast slab much less susceptible to flux entrainment, capture of bubbles and non-metal inclusions near the surface of the molten metal, and surface segregation. The magnetic field is preferably produced by arranging electromagnets in an opposing relation on both sides of the mold to lie side by side in the direction of longitudinal width of the mold, and supplying a single-phase AC current to each coil. The single-phase AC current preferably has frequency of 0.10 to 60 Hz. A static magnetic field can be applied intermittently in the direction of thickness of a cast slab.

This technique can produce a cast slab substantially free from the flux entrainment and the surface segregation. Preferably, the static magnetic field is intermittently applied under setting of an on-time $t_1 = 0.10$ to 30 seconds and an off-time $t_0 = 0.10$ to 30 seconds. Also, the static magnetic field is preferably applied to the surface of the molten metal.

FIG. 1

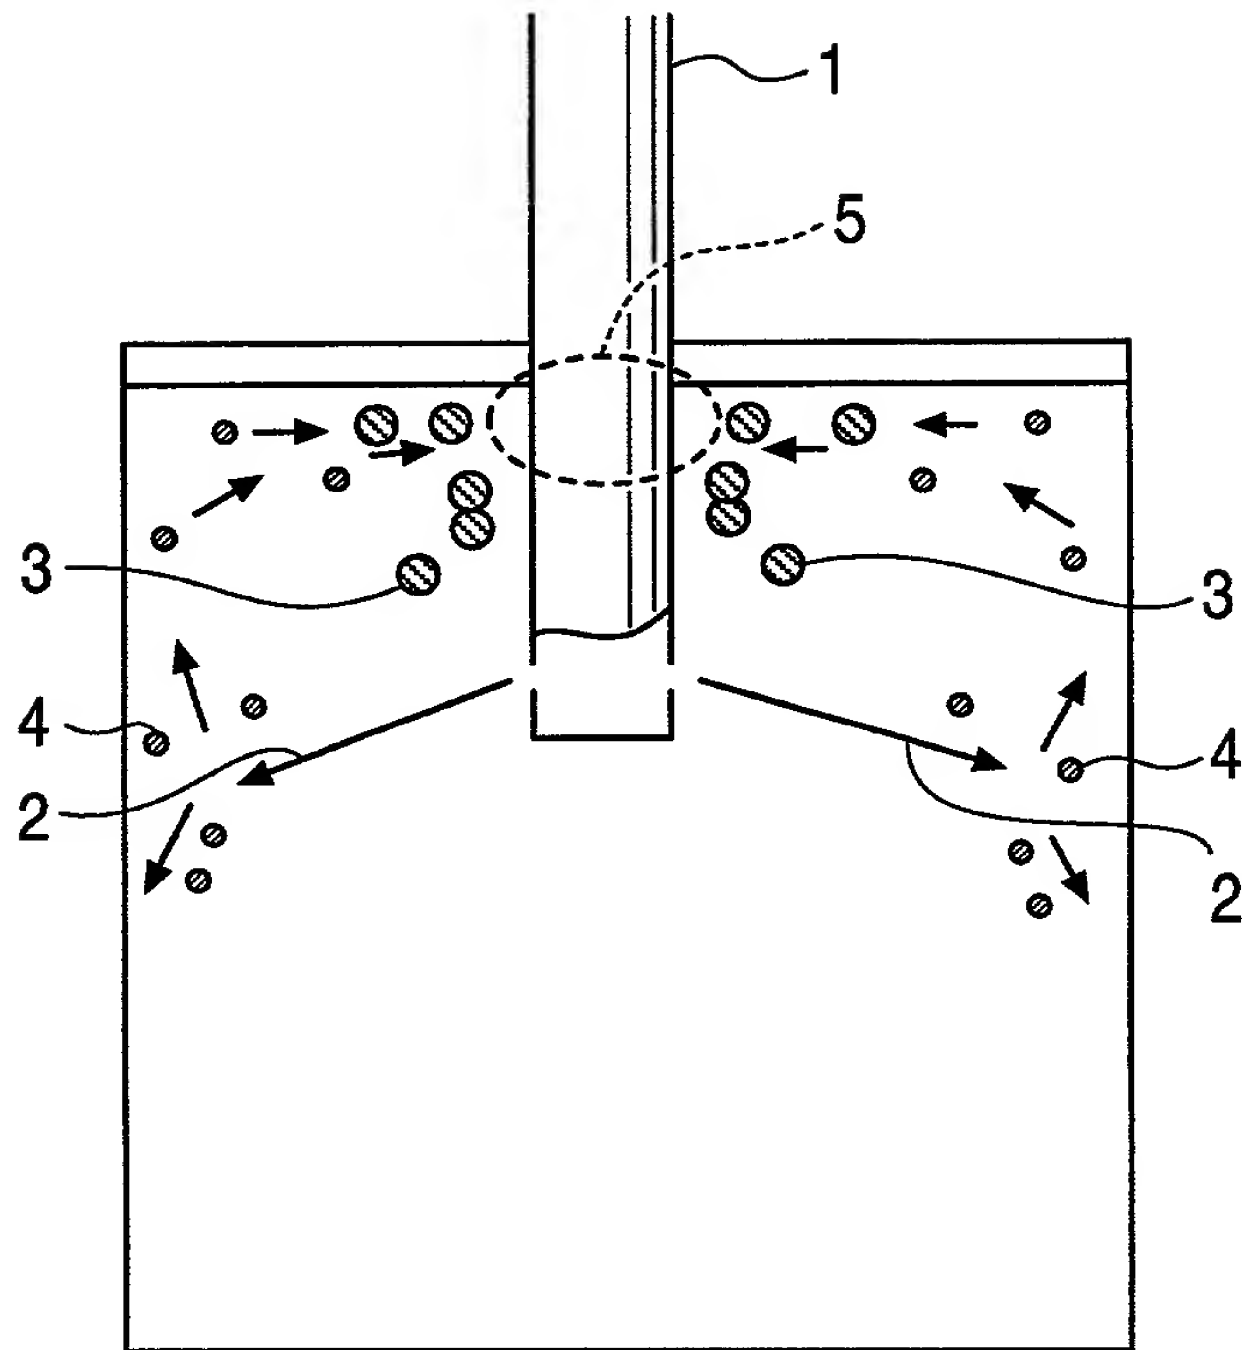


FIG. 2

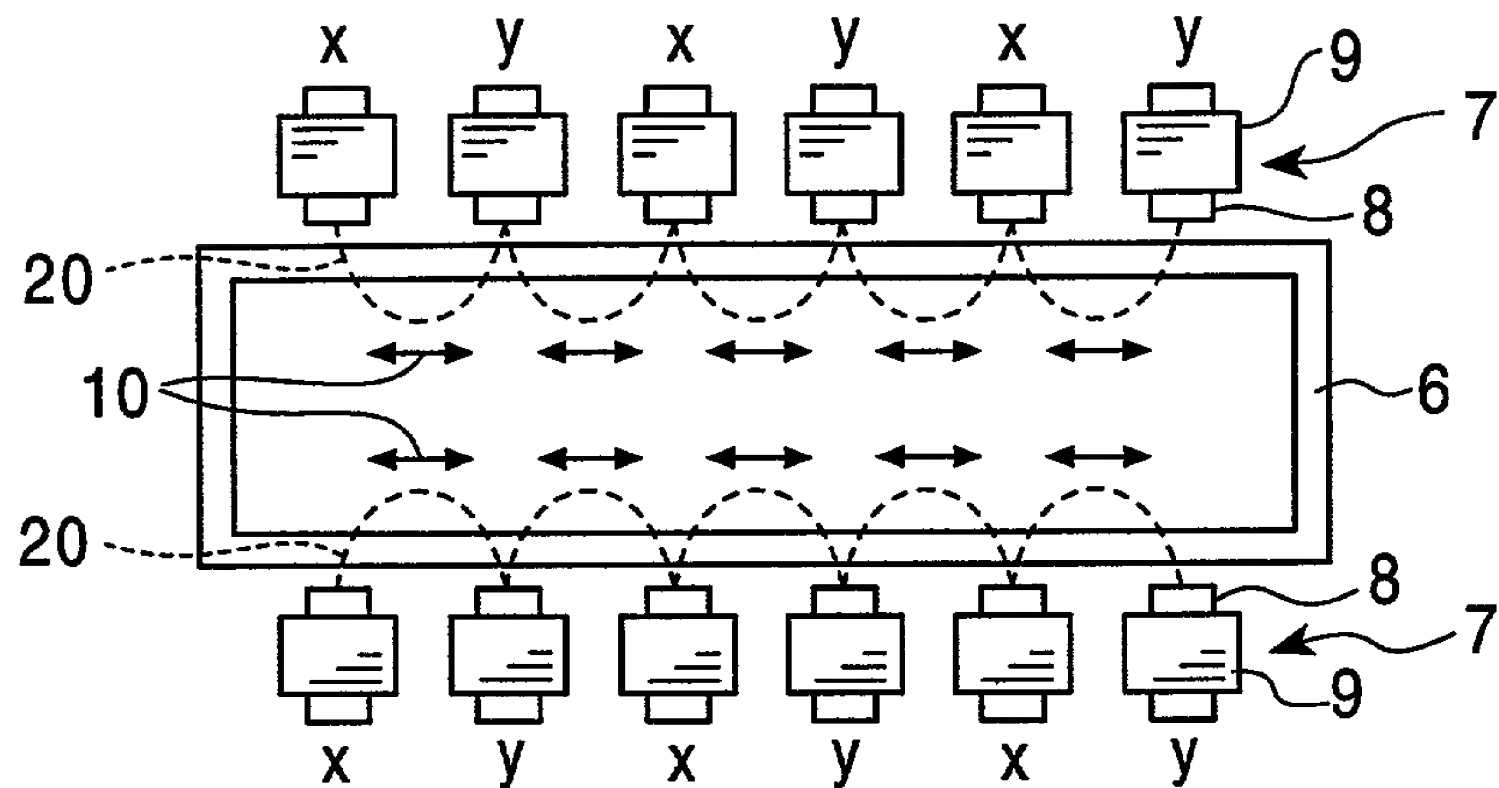


FIG. 3

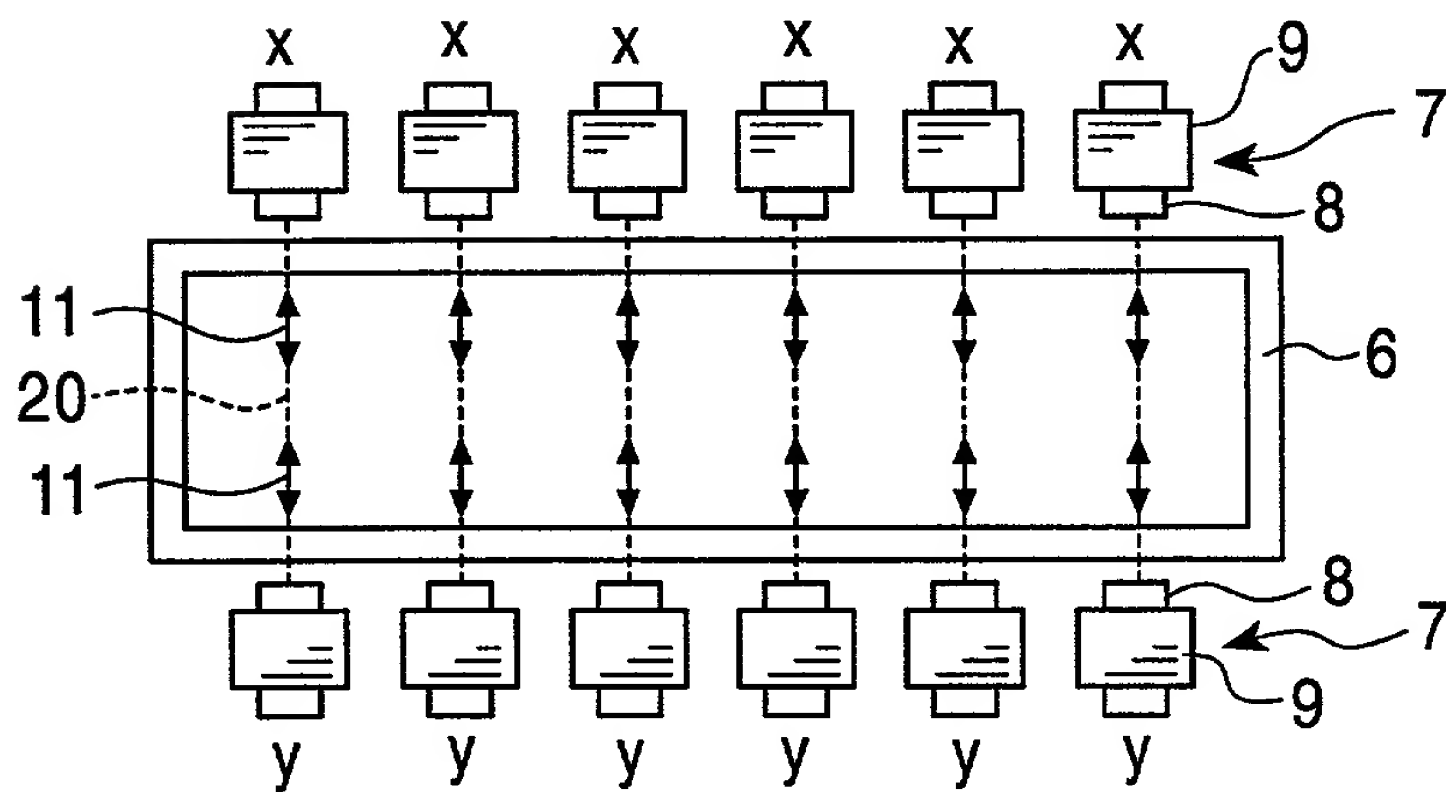


FIG. 4

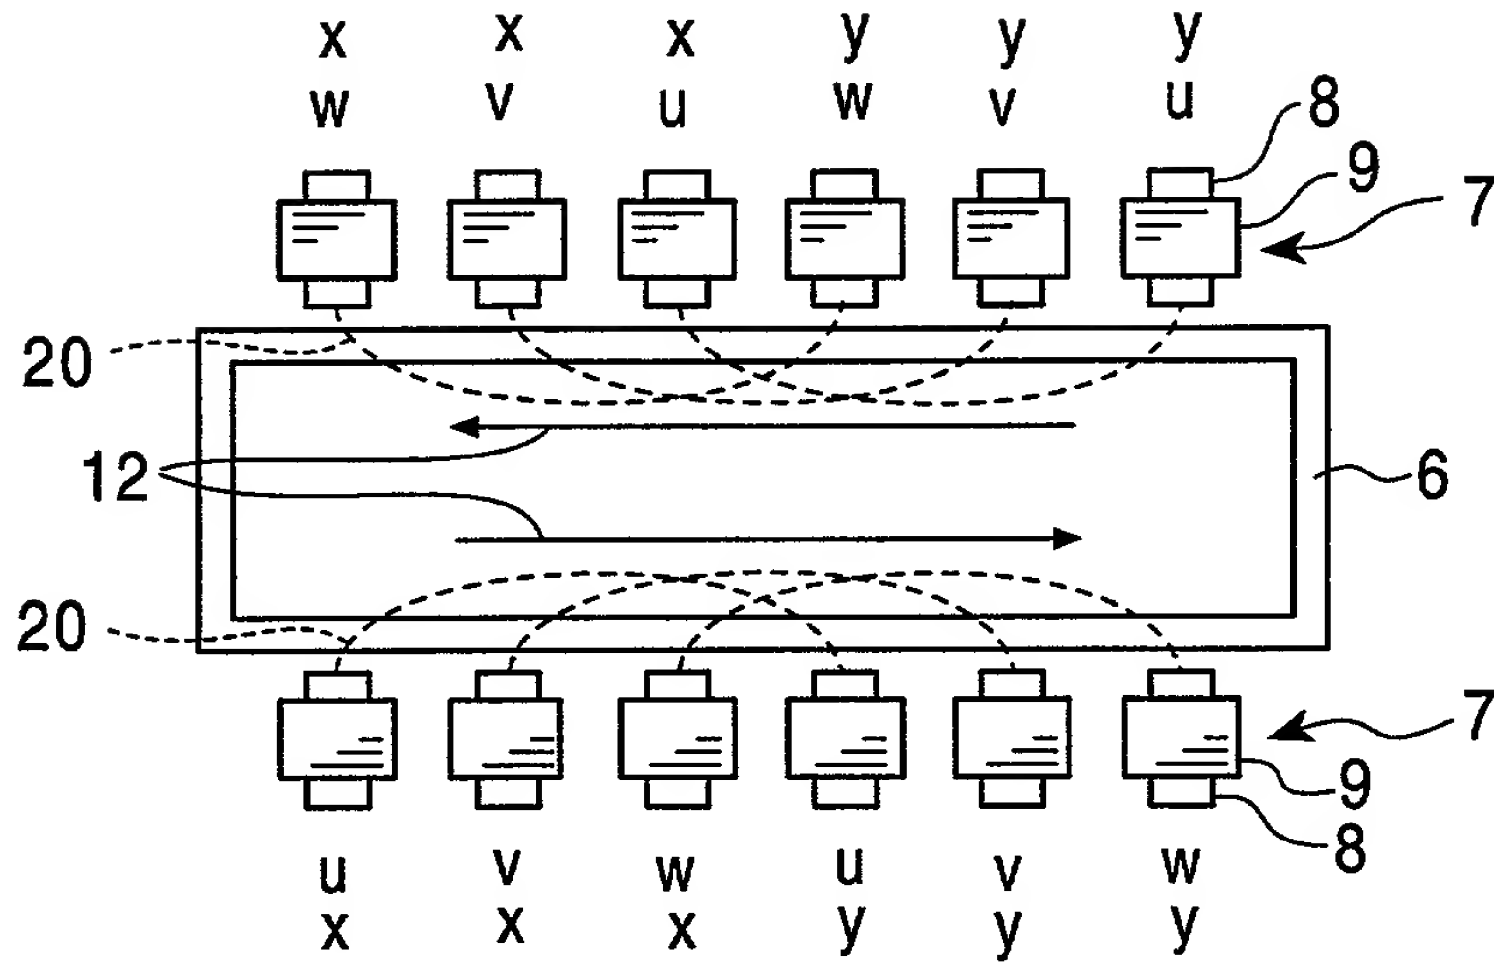


FIG. 5

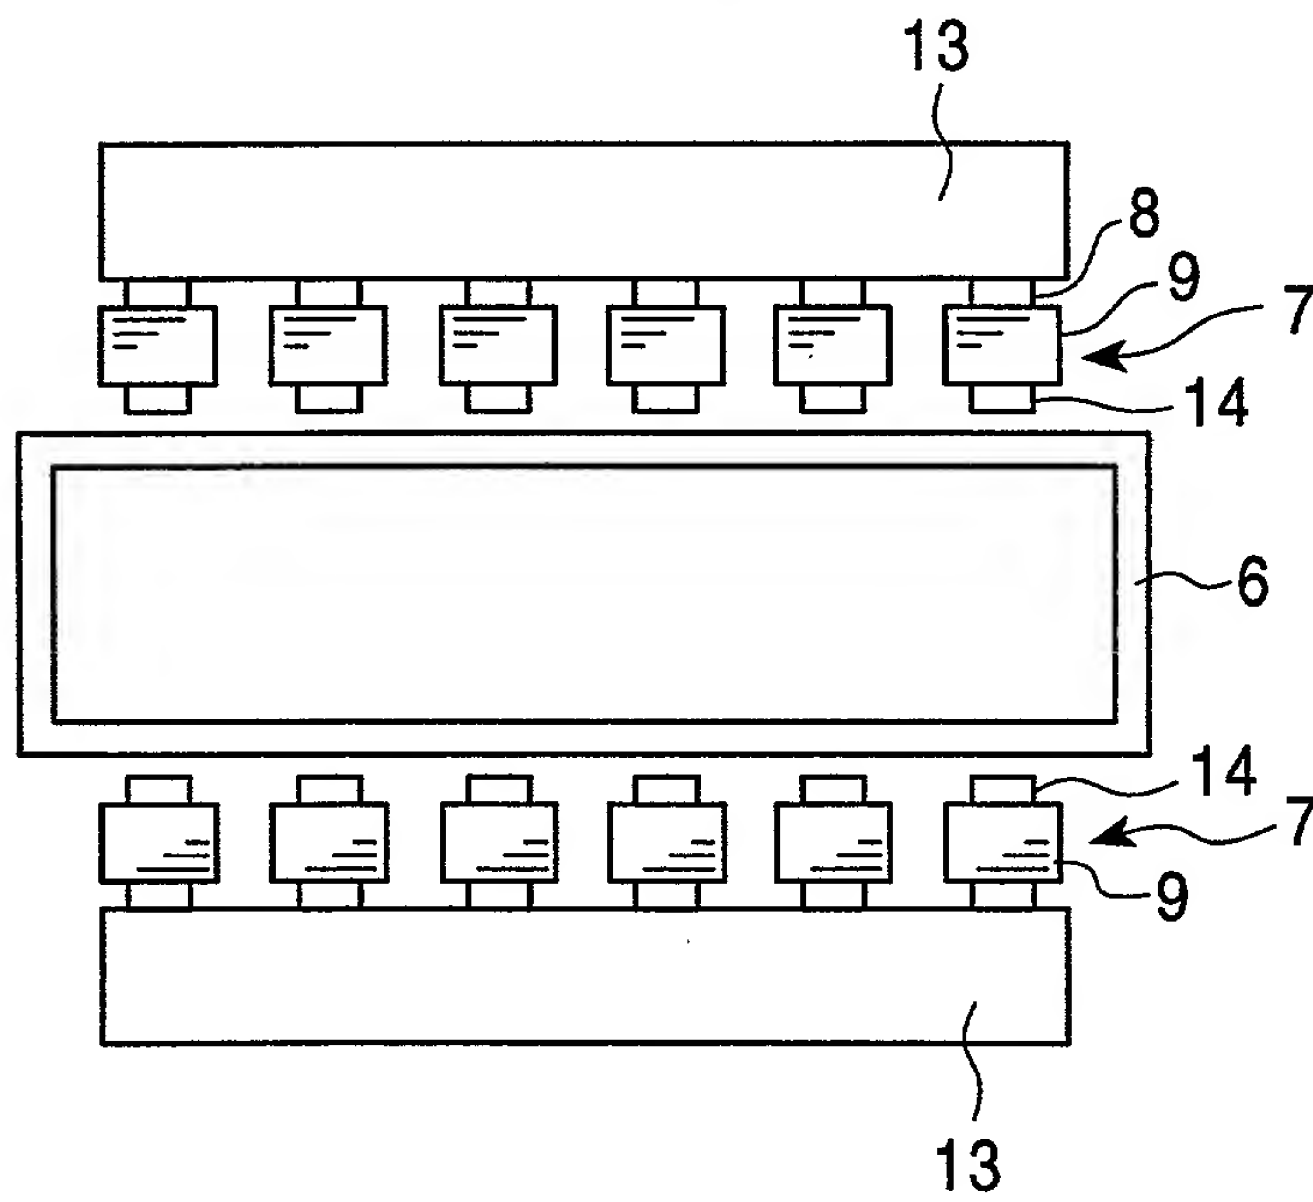


FIG. 6

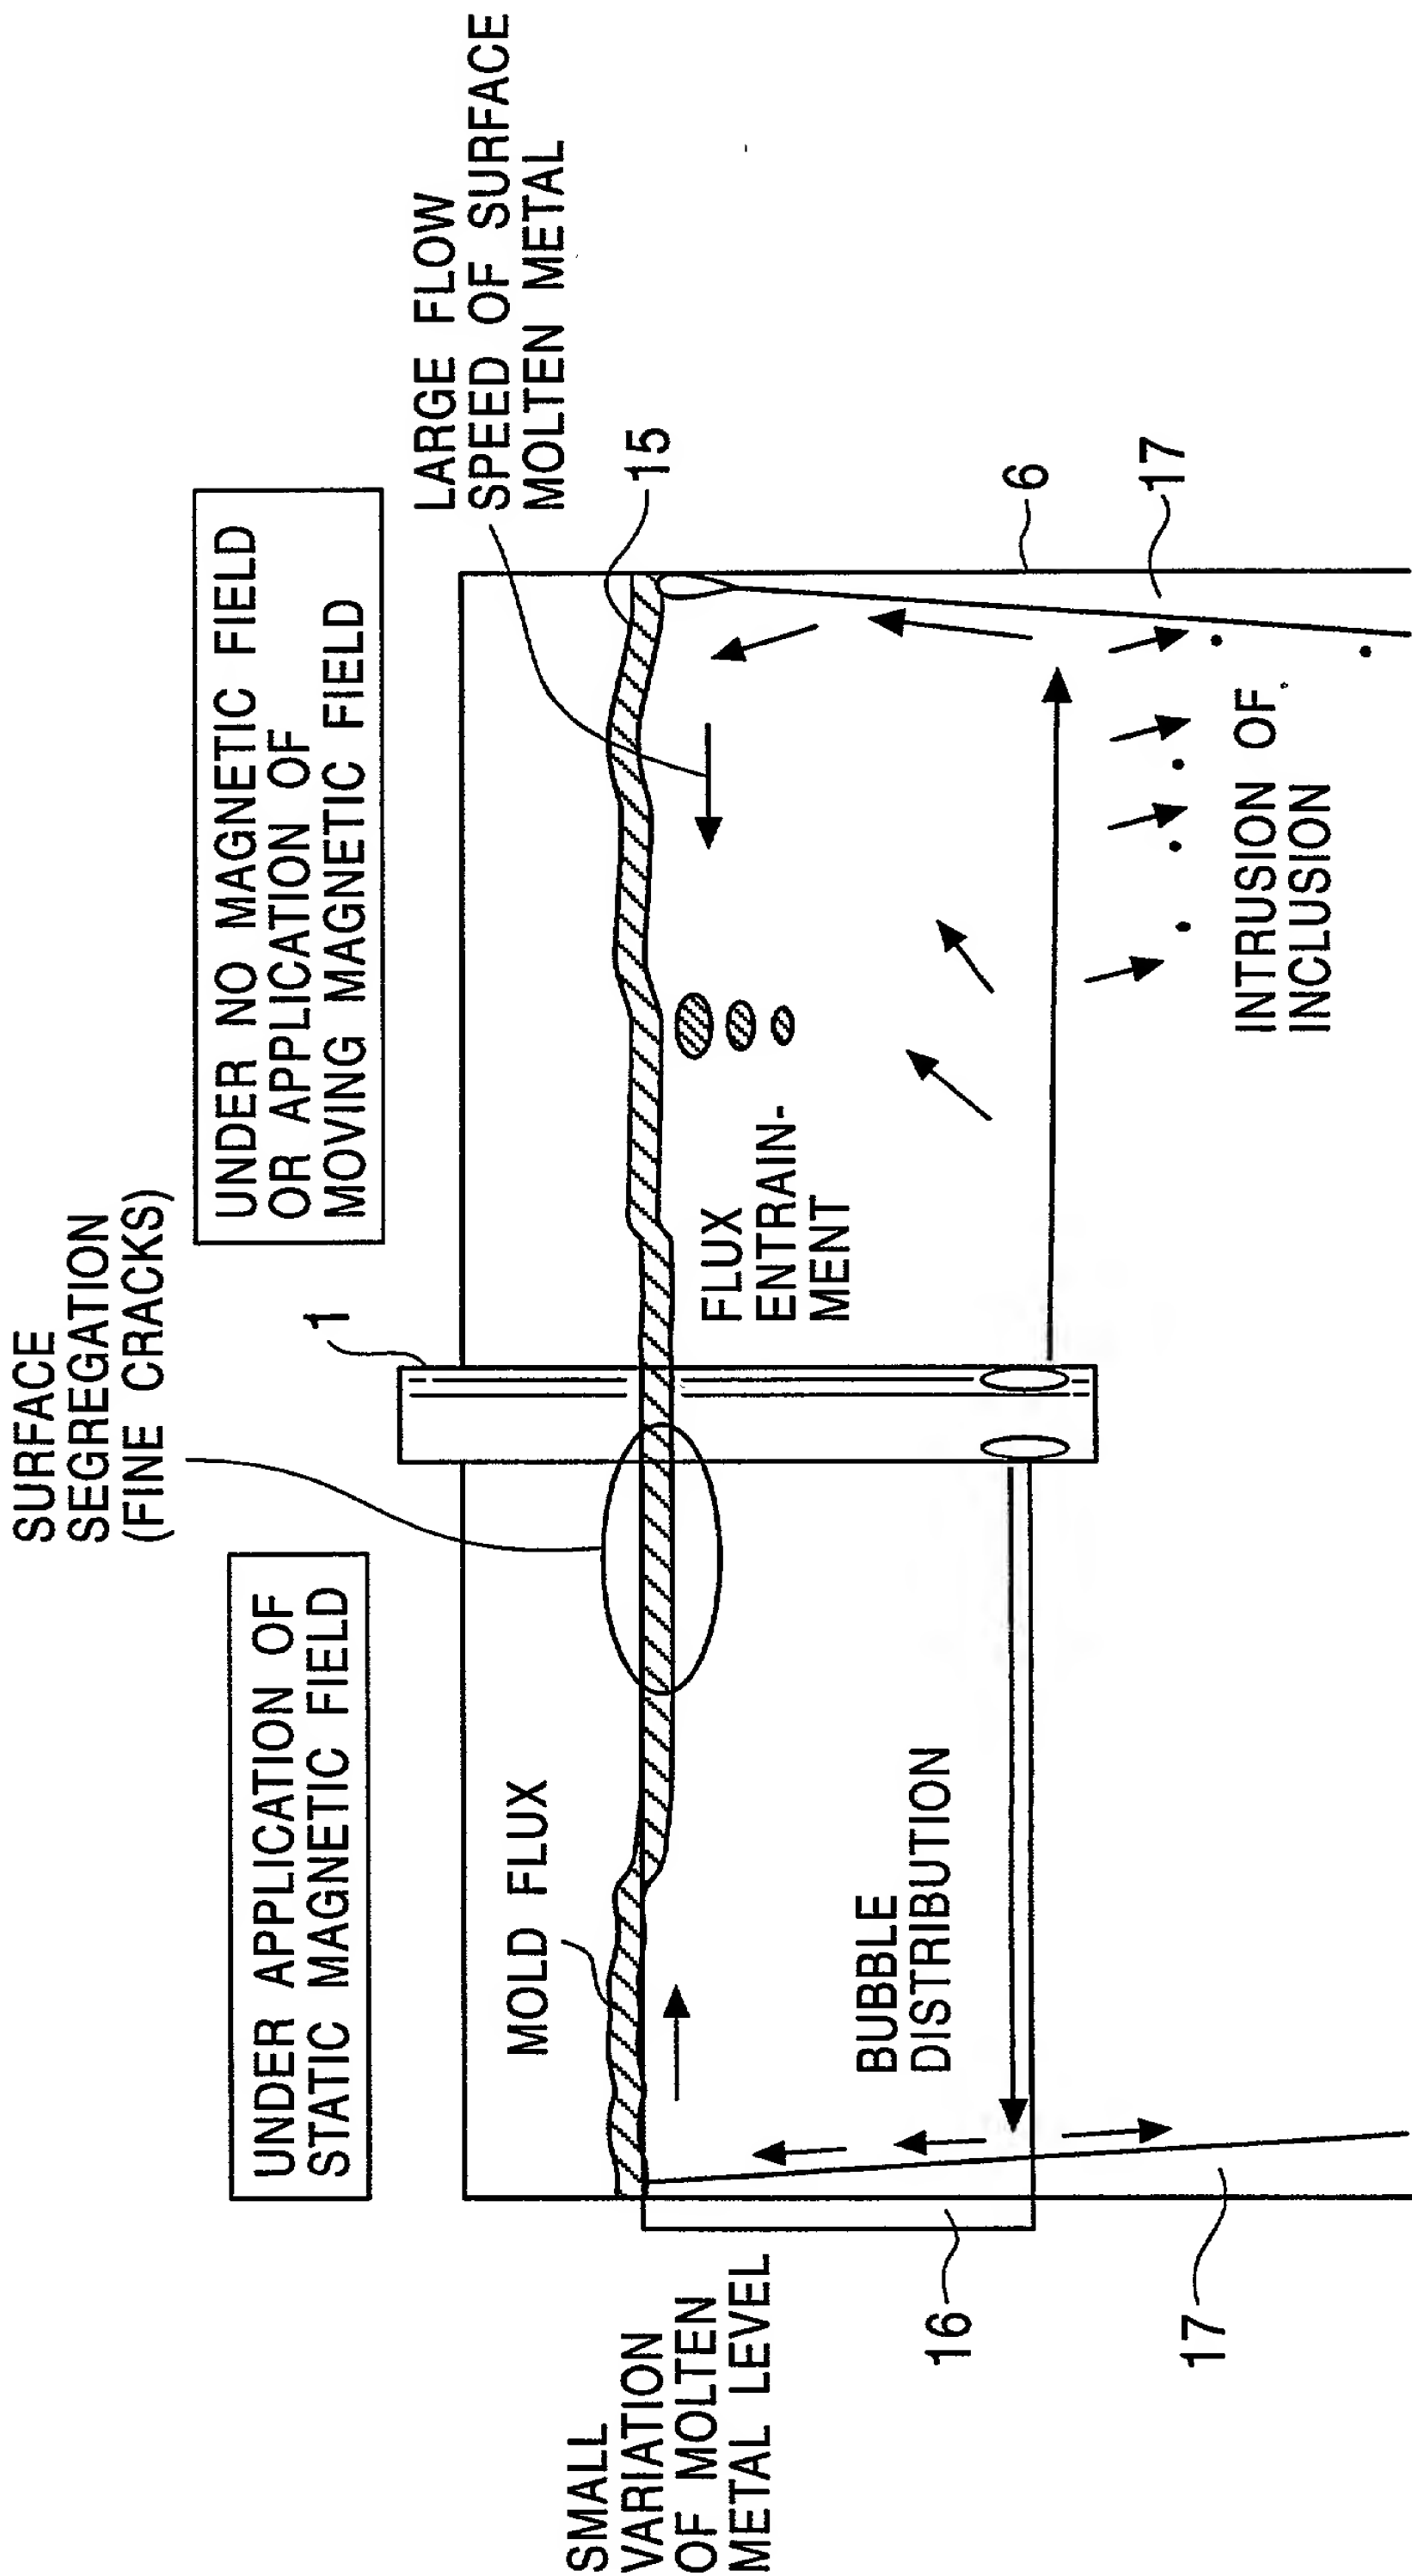


FIG. 7

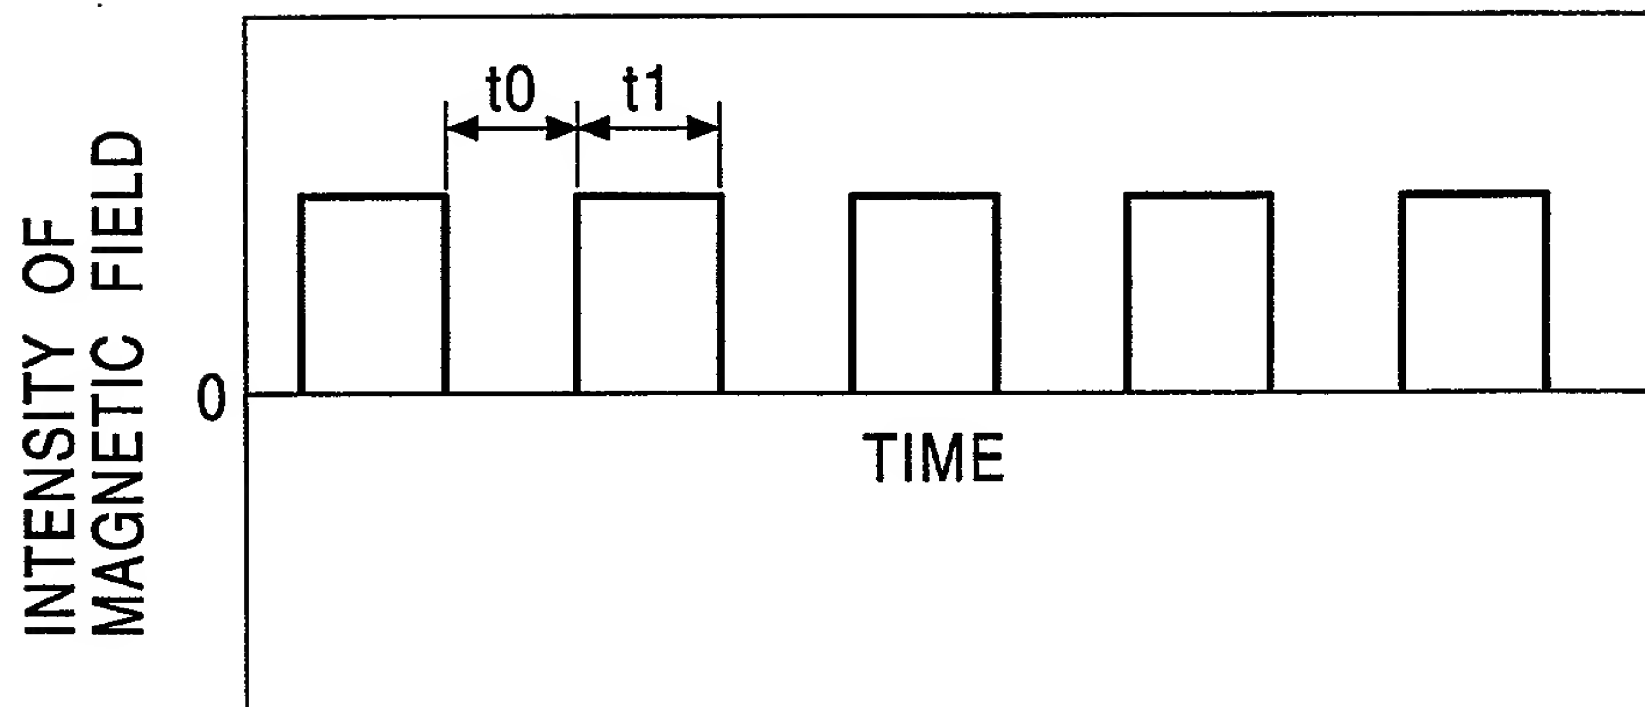


FIG. 8

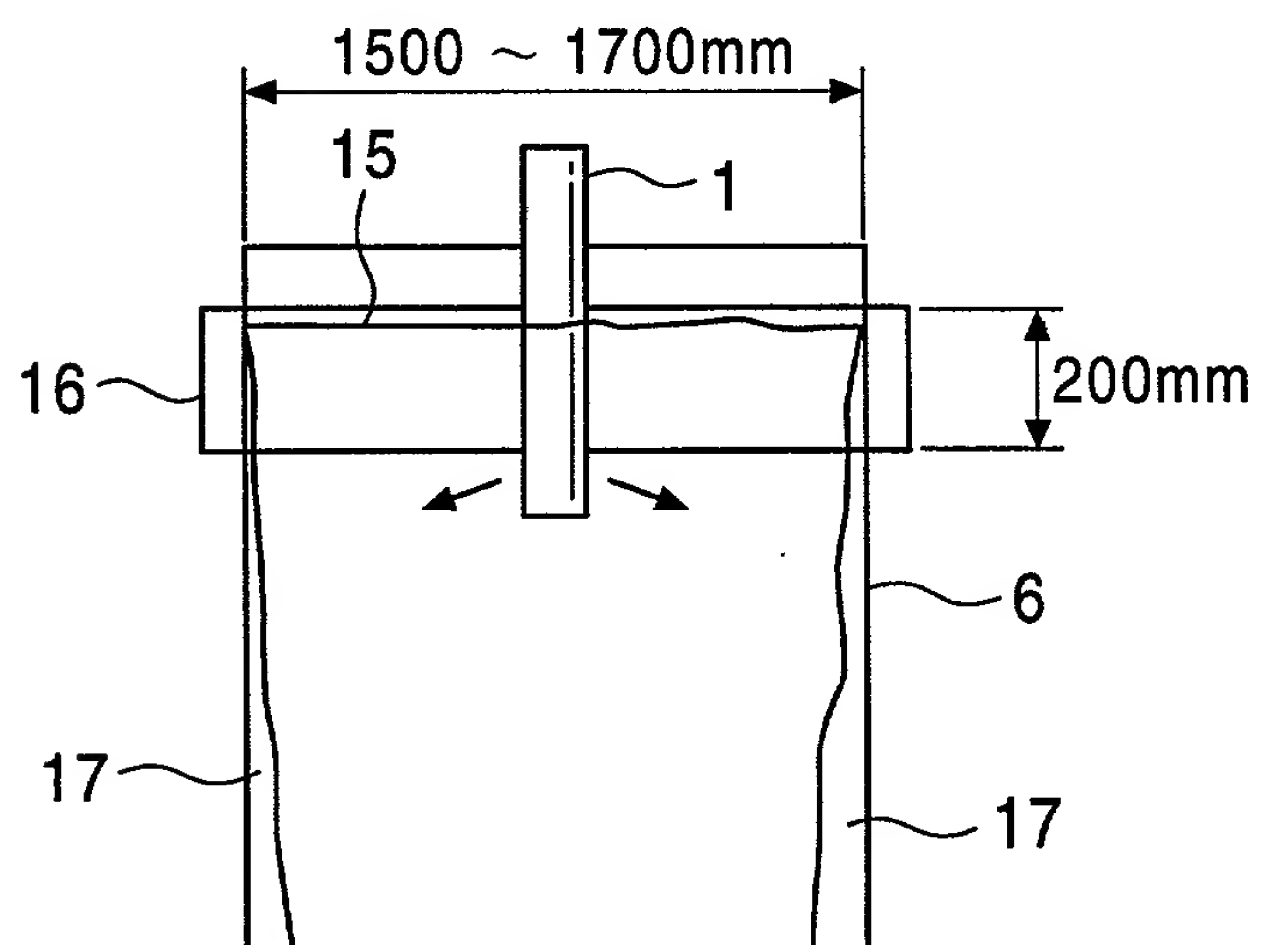


FIG. 9A

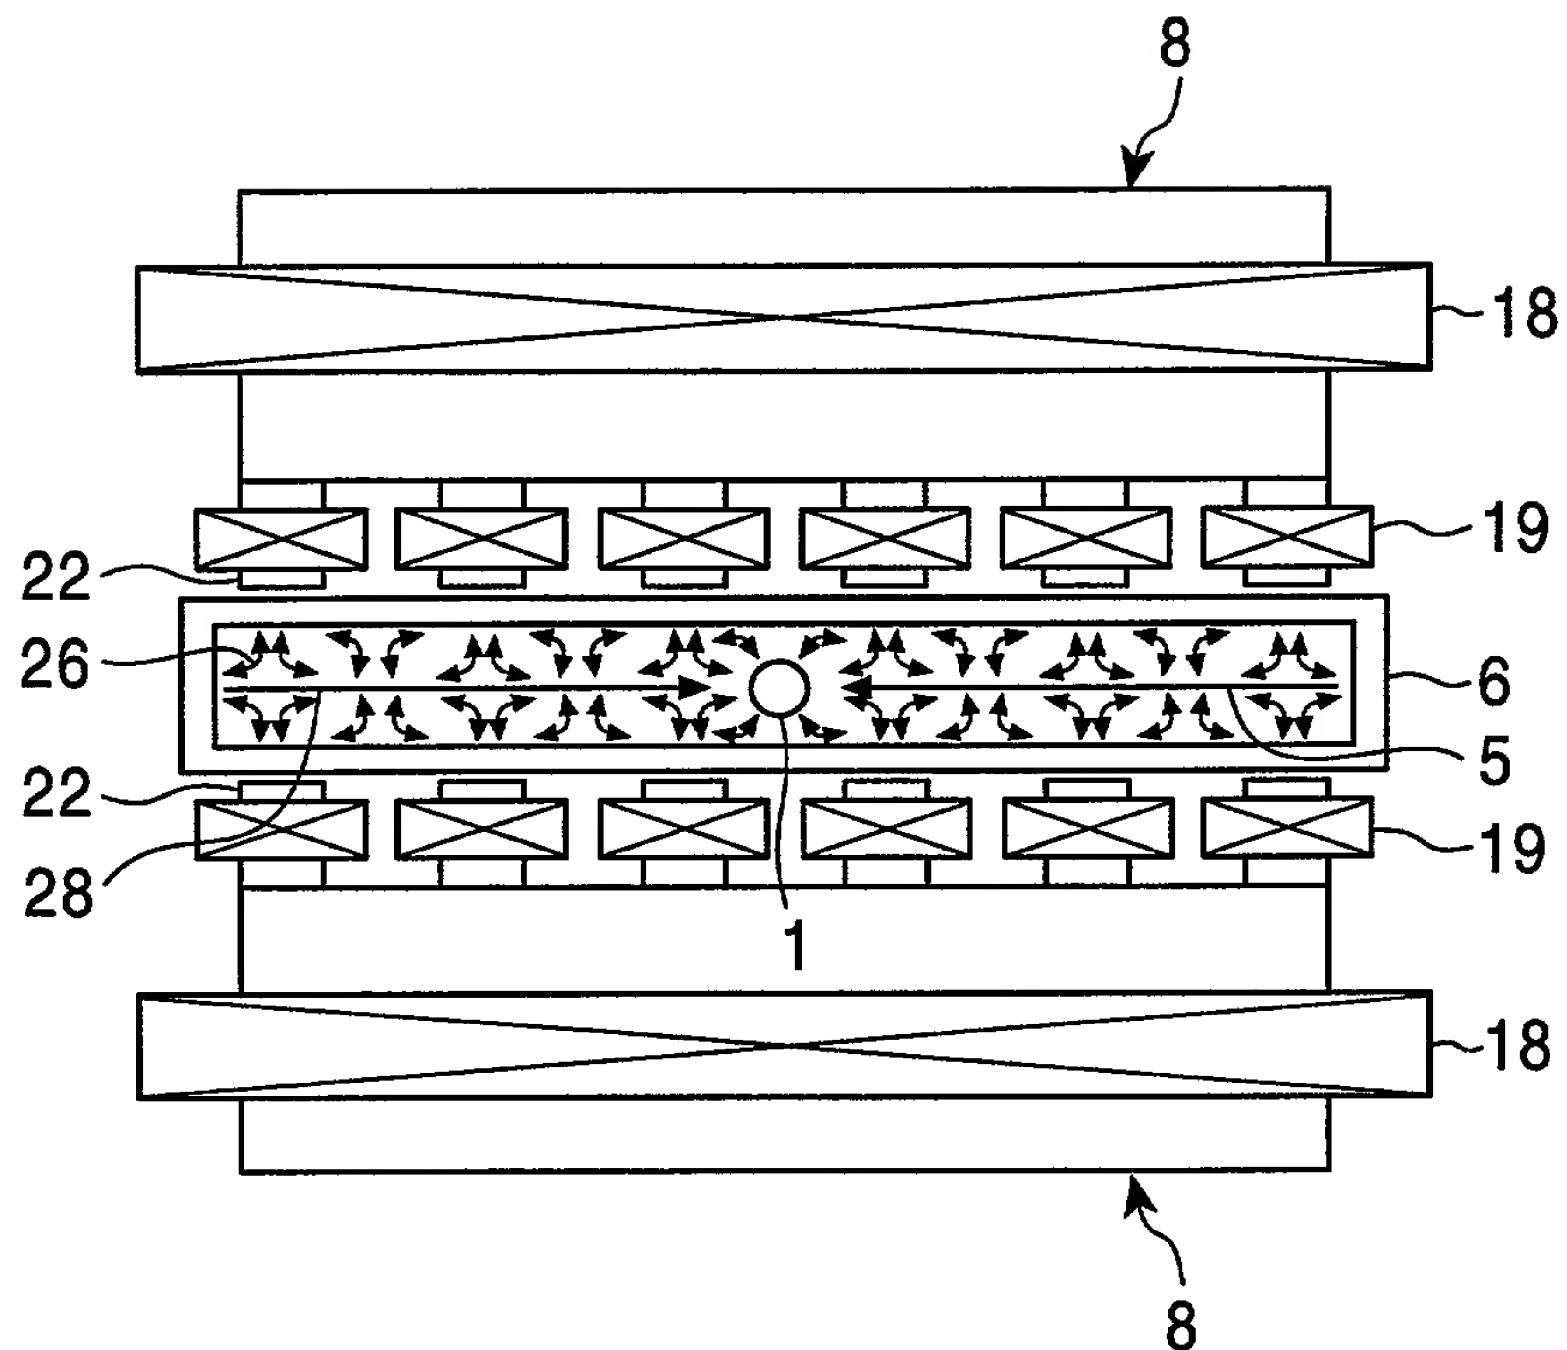


FIG. 9B

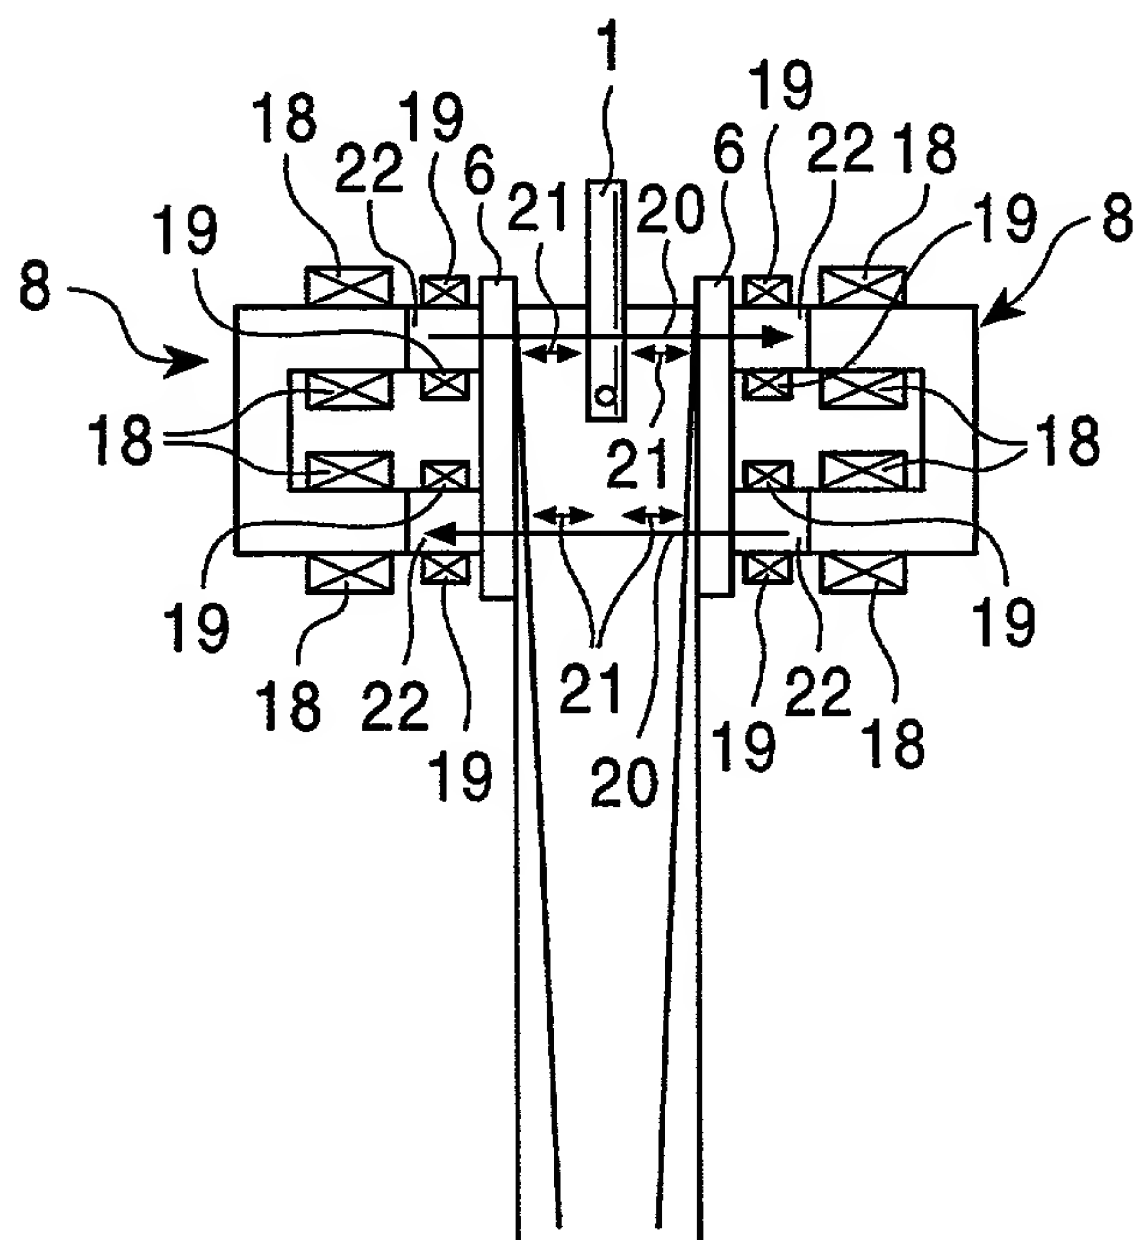


FIG. 10

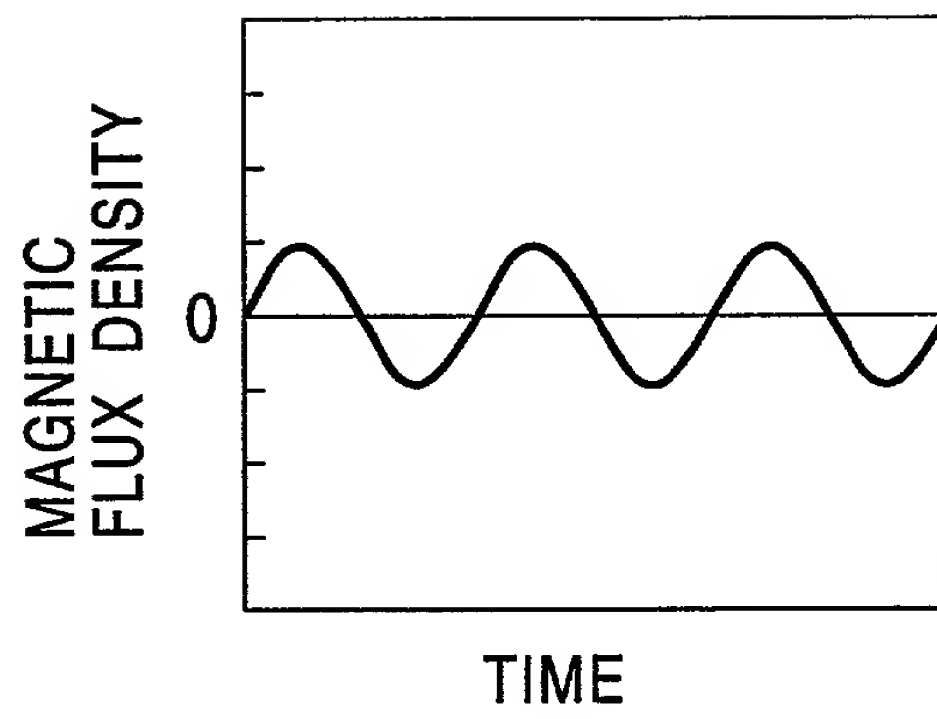


FIG. 11

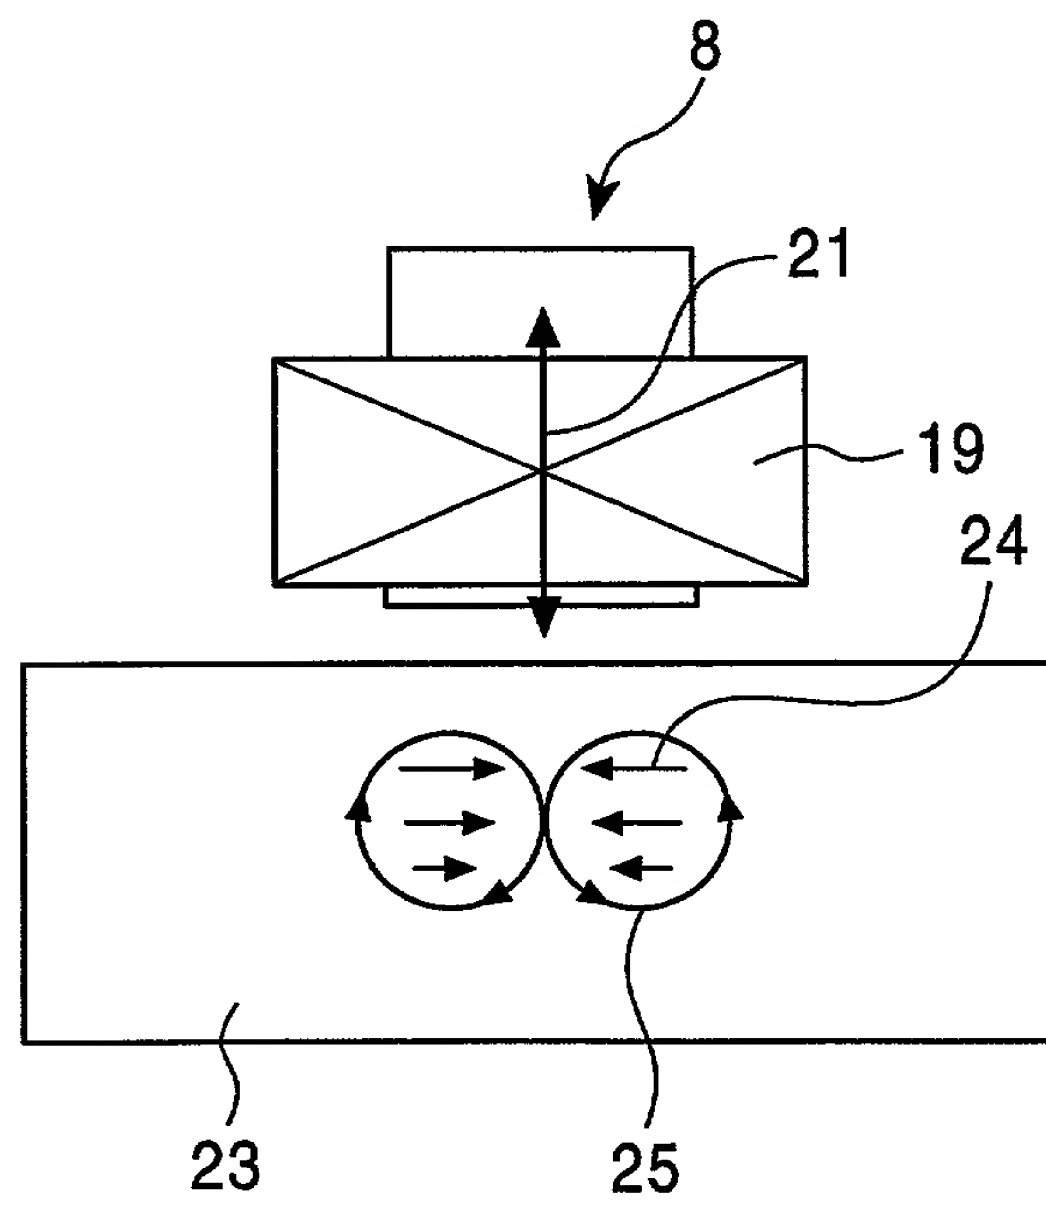


FIG. 12

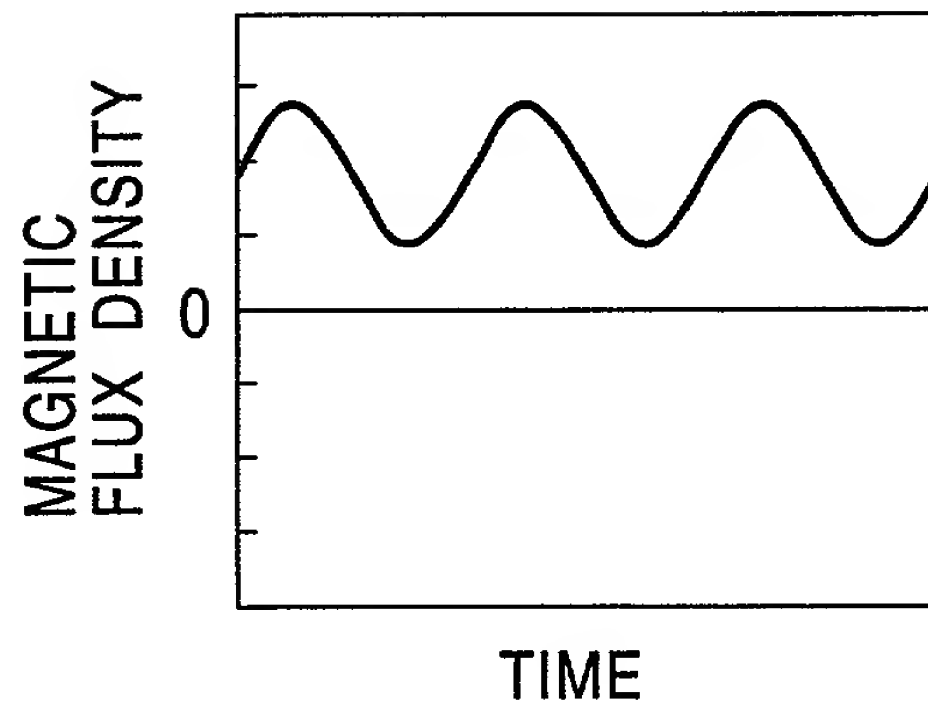


FIG. 13

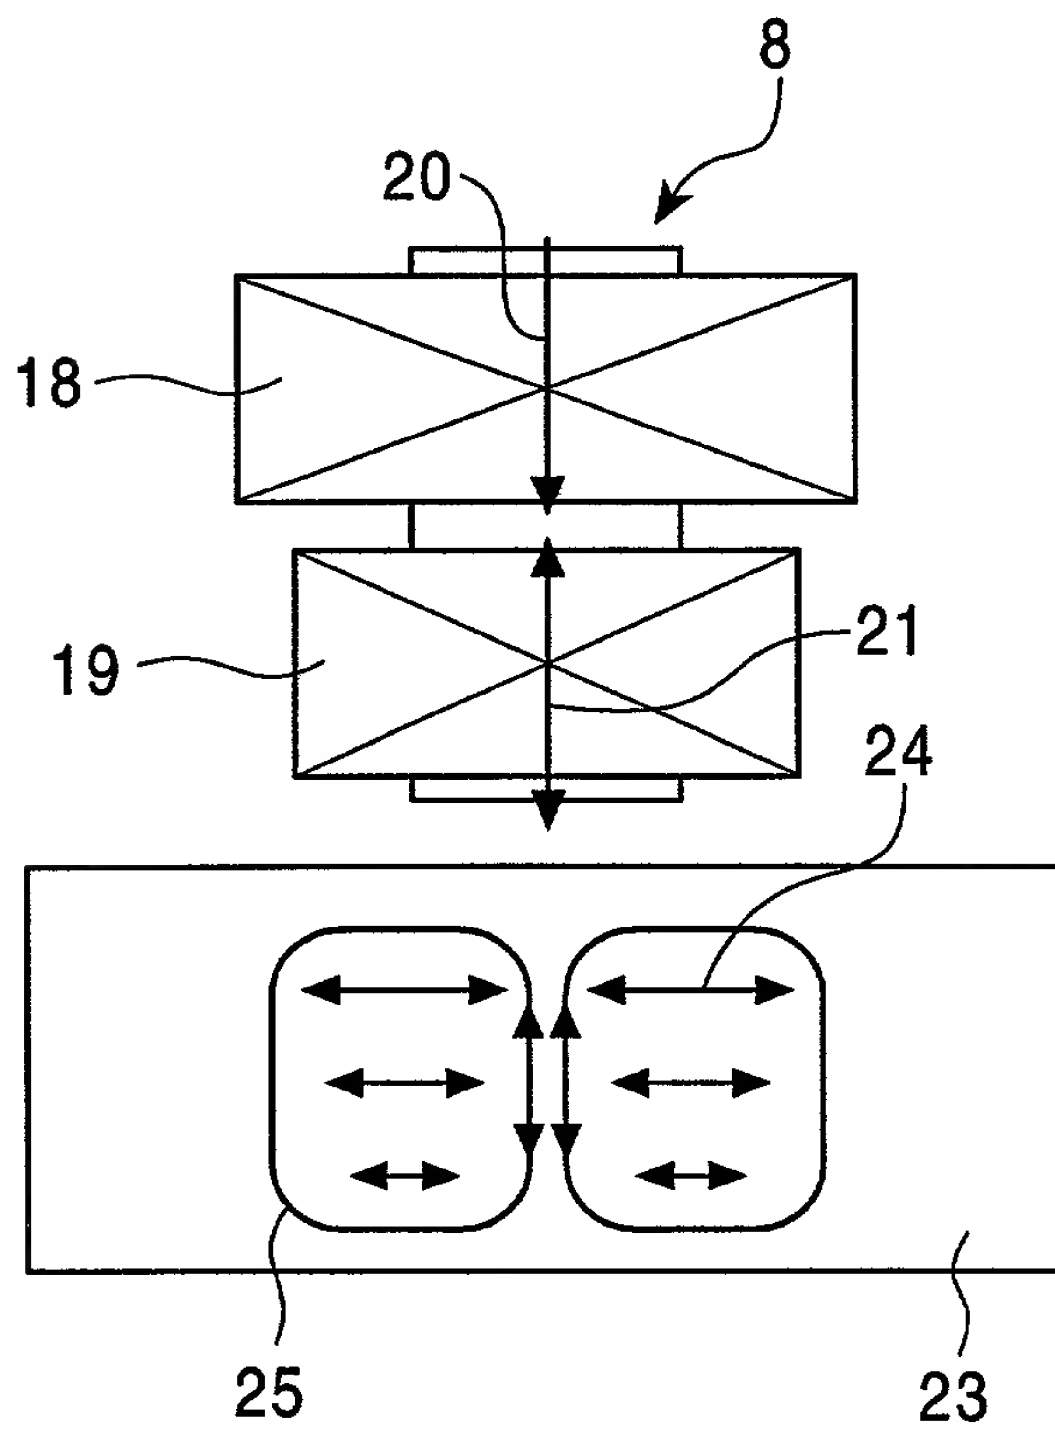


FIG. 14

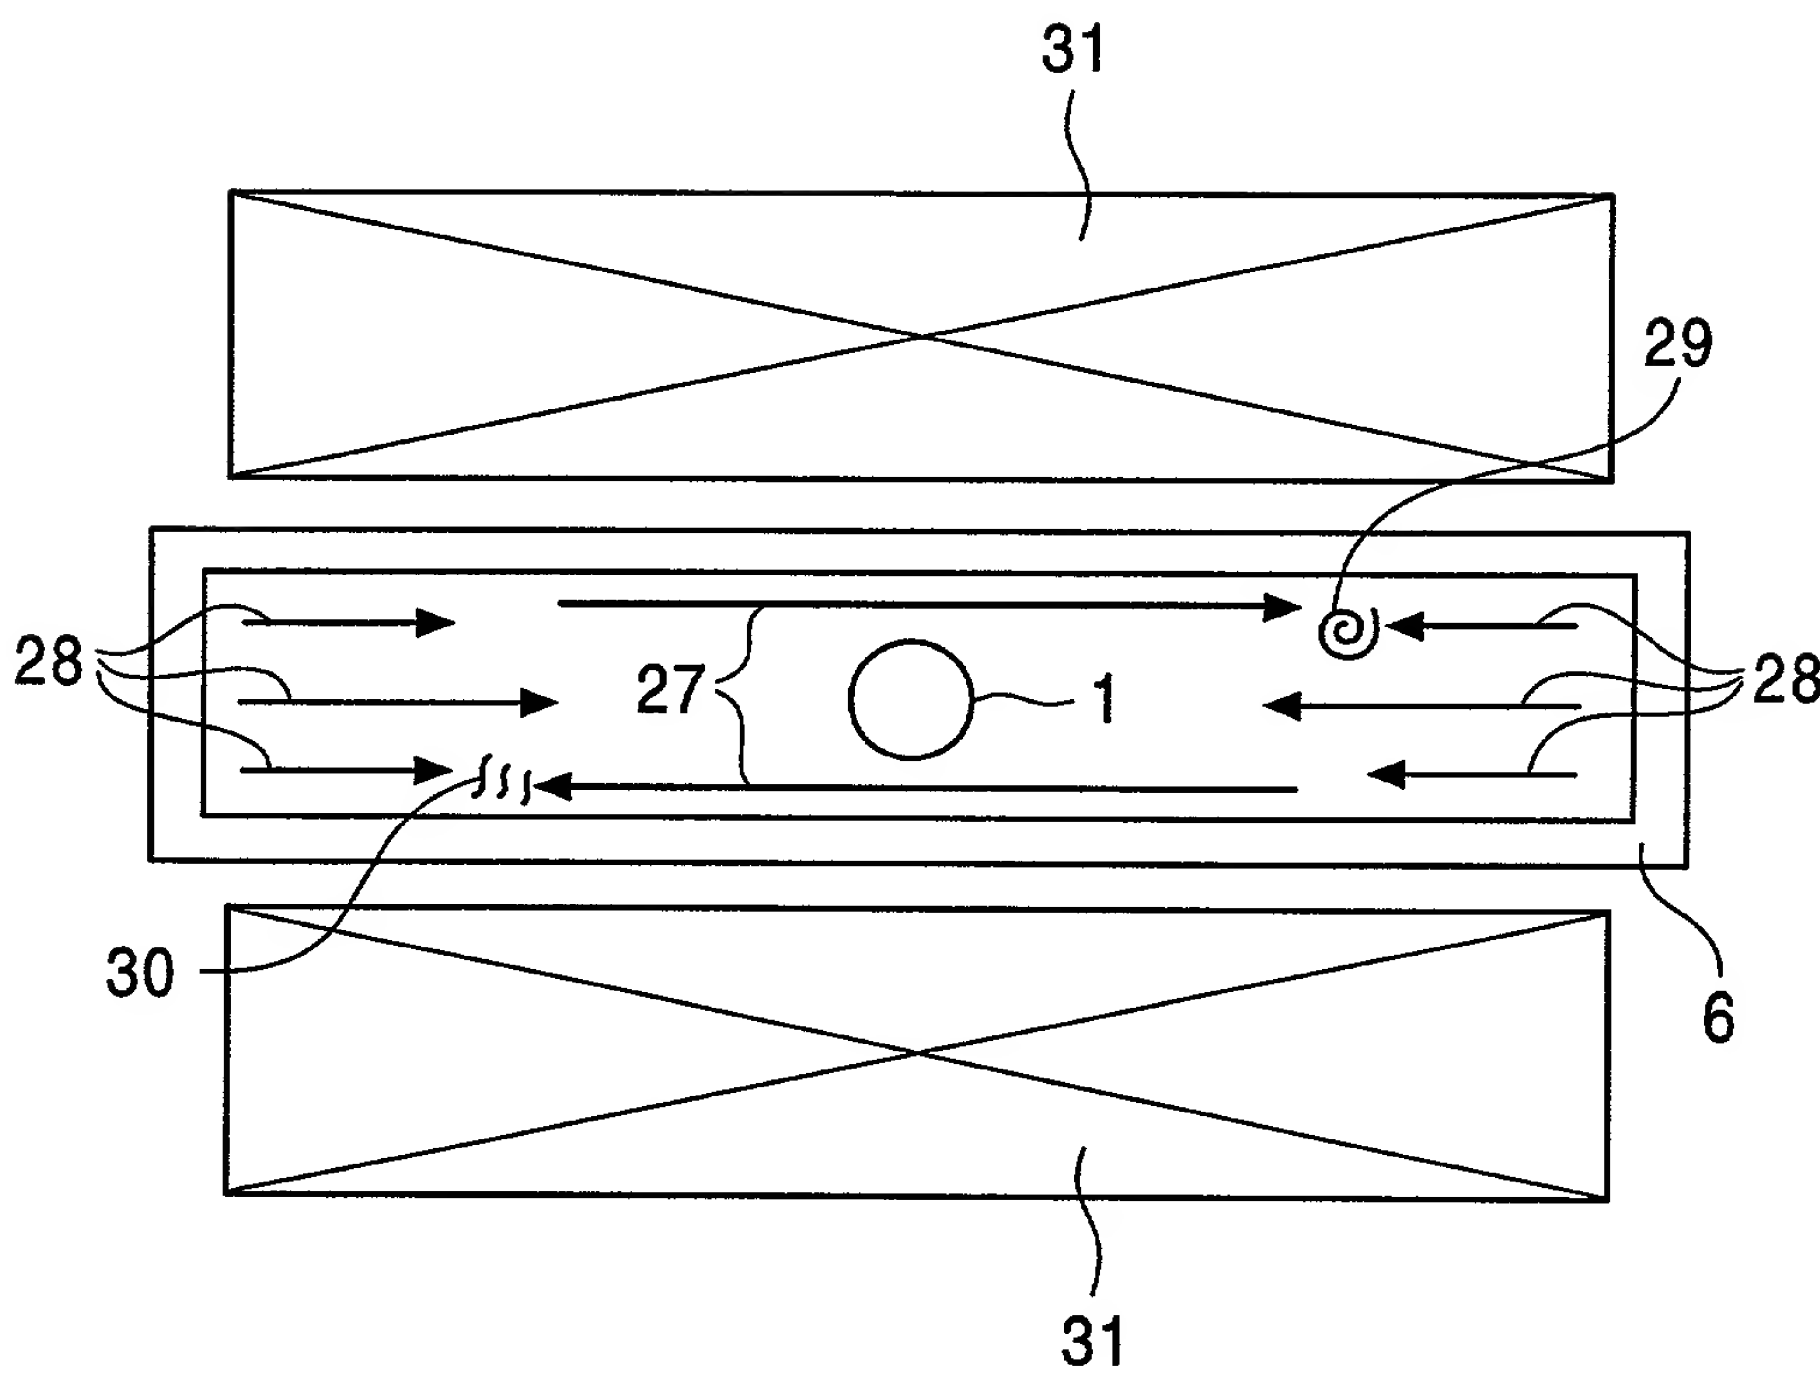


FIG. 15

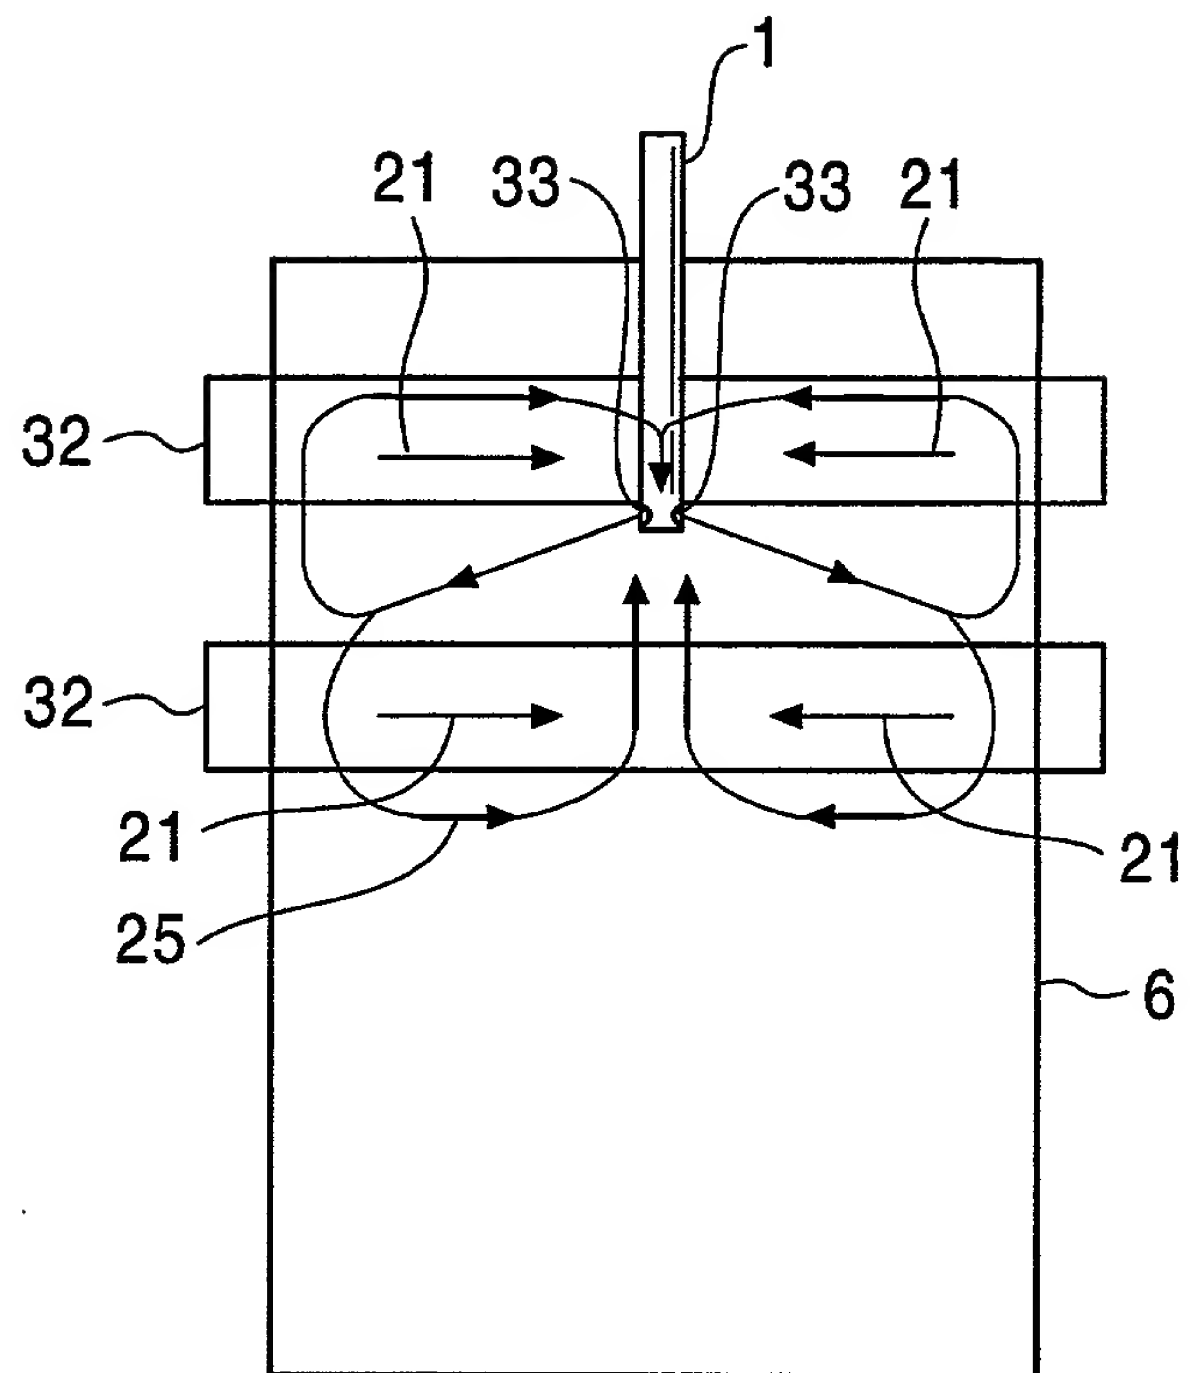


FIG. 16

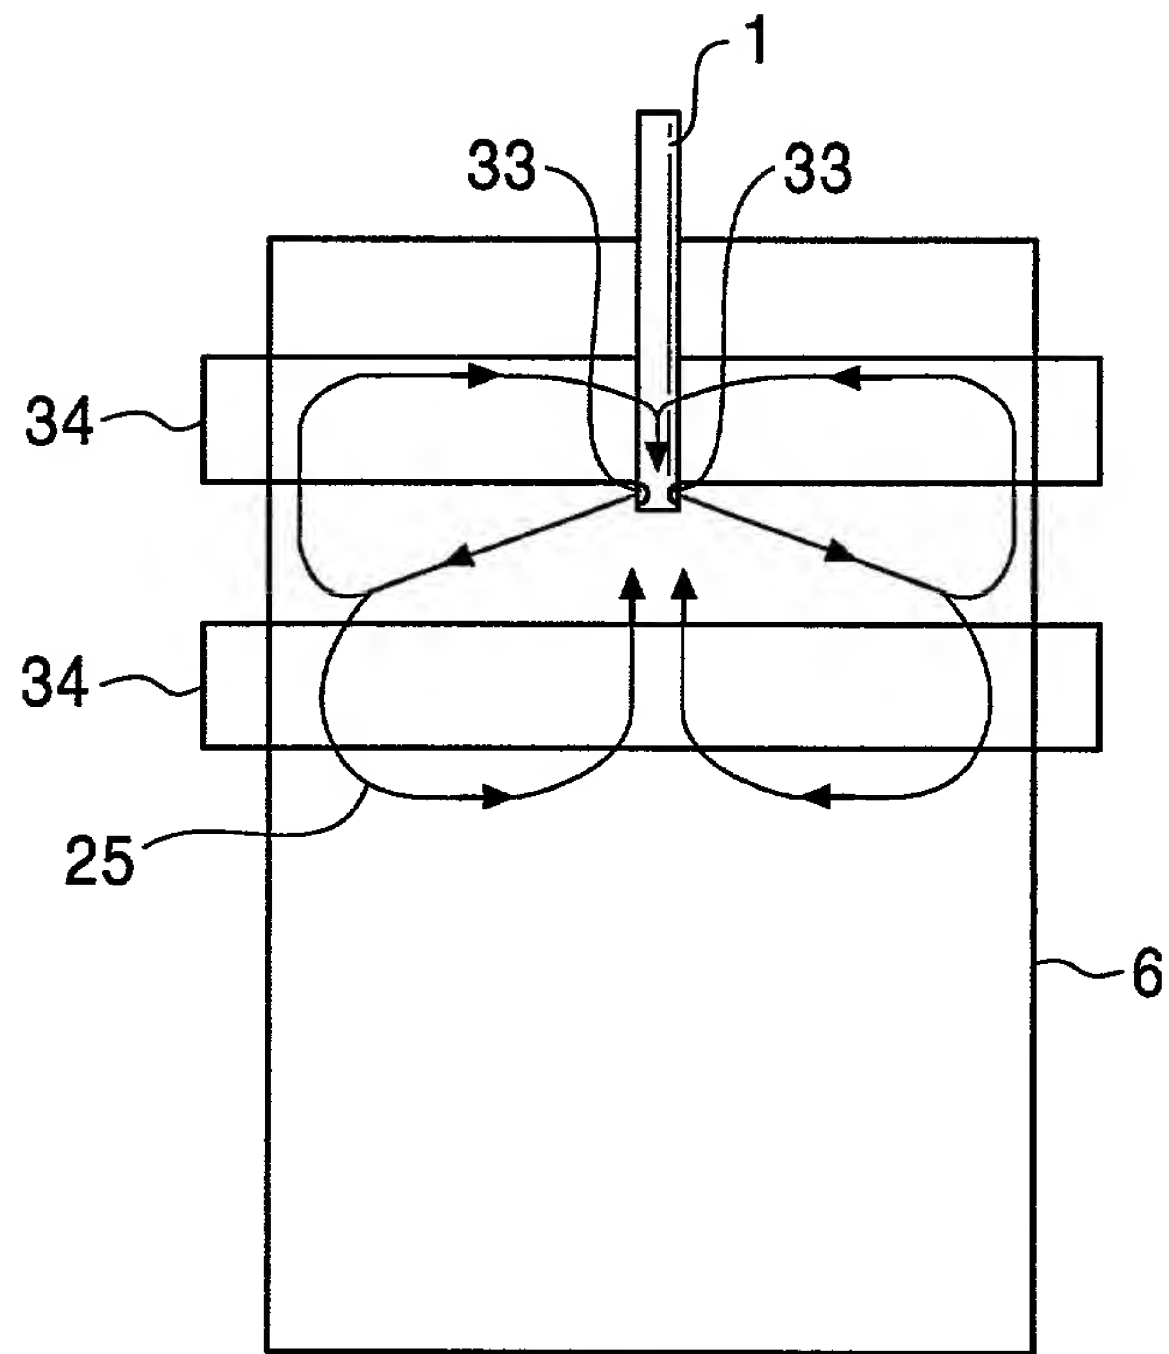


FIG. 17A

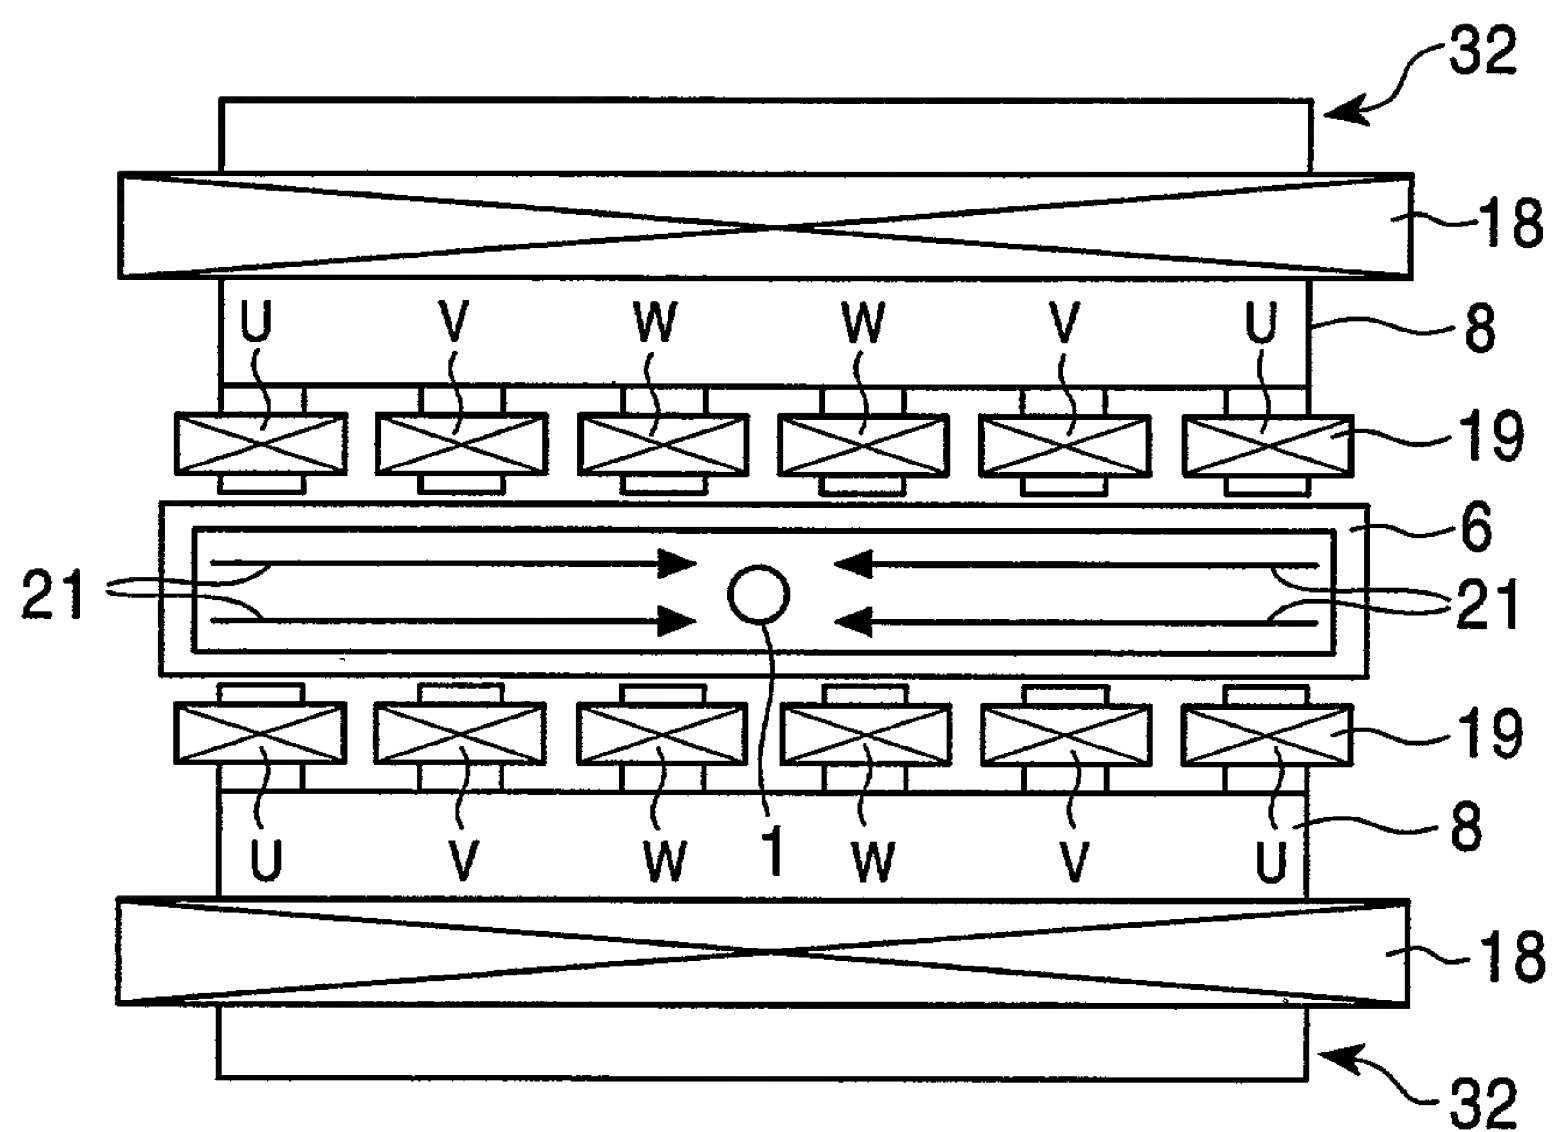


FIG. 17B

